







lifestyle



Towel Rails and Radiators Vogue UK Est d 1990

be .- all spired of the second second



Welcome to Vogue UK – the country's leading manufacturer of heated towel rails, designer radiators and accessories. Established in 1990 within the heart of the West Midlands, and still privately owned by its original founders, Vogue UK continues to design and create more products than any other company in this field, constantly leading the trend by combining fashion with functionality.

Everyone has their own sense of style and that's why Vogue UK has created a range of products that meet the needs of every interior design style. If you require something unique then our craftsmen can create a design to your exact brief. As Vogue UK have been creating towel rails and designer radiators since 1990 the company has built an extensive portfolio of designs and can offer a bespoke service, ideal if you're looking to create an authentic period look or simply match an existing design.

Our six categories of products in this brochure and on our website are sure to encompass the perfect design for you.... no matter what shape, style or size you're looking for.

CONTEMPORARY	LADDER RAILS	TRADITIONAL	DESIGNER RADIATORS	ELECTRIC	ADDITIONS





Bespoke Design & Manufacture Service

'Liberty to Customise'

If your exact requirements are not illustrated within our literature, we offer a bespoke service. This service allows you to customise your towel rail or radiator dimensions, materials and finishes.

'Freedom to Realise Your Ideas'

We can work from any design specification and handcraft special products from high quality brass or stainless steel. Our team will offer technical advice to ensure your design is viable before a quote is issued for approval and the product is manufactured.

'Commissioned Project Expertise'

We are dedicated to combining innovative design with a high level of client services. This collaborative design process involves the active participation of you, our client.

We help clarify visions, execute 3D designs and manufacture the bespoke end product.

Every effort is made to ensure the design process is swift. Vogue UK has extensive experience working with architects, contractors and individuals alike.

Brass Manufacture



DZR Brass

The highest quality brass available in a finish of your choice. Corrosion resistant and provides a superior plated finish.



A 30 year quality assurance guarantee

On our brass products showing this symbol.



Heating and Hot Water Suitable for all heating and hot water systems.

Mild Steel Manufacture



Mild Steel

Quality mild steel available in chrome and painted finishes suitable for indirect /closed heating systems.



A 15 year quality assurance guarantee

On mild steel products showing this silver symbol.



Heating Only


Suitable for closed indirect heating systems.



A 2 year quality assurance guarantee

On our products showing this symbol.

Stock Information





Giving an easy to clean finish that is resistant to corrosion and has a high heat output.

5



A 30 year quality assurance guarantee

On stainless steel products showing this symbol.



Heating and Hot Water

Suitable for all heating and hot water systems.

Additional Requirements



Electric only

Can be specified where this symbol is displayed. Please see page 144 for full range and price supplements.




Heating and Electric

Can be specified where this symbol is displayed. Please see page 144 for full range and price supplements.



Electric Dryline

Can be specified where this symbol is displayed. Dryline technology, heated via a heater cable. POA



The 'Handprint' symbol in the product specification tables denotes a made to order product.

For further information on product symbols and meanings please call +44 (0) 1902 387000 or email sales@vogueuk.co.uk

Stainless Steel



beish

VOGUE Contemporary Towel Rails

For the past 28 years we have been proud to be at the forefront of new designs. Every year we work with interior designers to produce products of style with substance.



CONCERTINA Wall Mounted DR010



VL003 DE Ø 19 + 32mm For electric element & valve options see pages 144 & 148

Concertina is a beautiful iconic rail. Towels slide easily in from the side and can be left or right hand mounted. Manufactured from high quality mild steel. Prices shown are for chrome finished for central heating models.

Concertina	Dimen	Dimensions (mm)			Pipe	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	Centres	element wattage	Watts/BTU's	∆⊺60°C BTU's	or made to order
DR010	1000	500	111	12	75	150	226 / 771	978	\checkmark
DR010	1000	600	111	12	75	200	311 / 1061	1345	\checkmark
DR010	1200	500	111	14	75	200	383 / 1307	1657	\checkmark
DR010	1200	600	111	14	75	300	423 / 1443	1830	\checkmark

MARINE Wall Mounted DR009




The Marine's innovative design is a focal point for any bathroom. The looped horizontal rails maximise both heat output and hanging space. Manufactured from high quality mild steel. Prices shown are for chrome finished for central heating models.



Marine	Dimensions (mm)			Bar config	Pipe centres	Electric element	Output Δ T50°C	Output ∆T60°C	Stock or made
MS 15 C	Н	W	D			wattage	Watts/BTU's	BTU's	to order
DR009	1400	600	177	25	110	400	767 / 2617	3318	\checkmark

CYGNUS Wall Mounted DR012

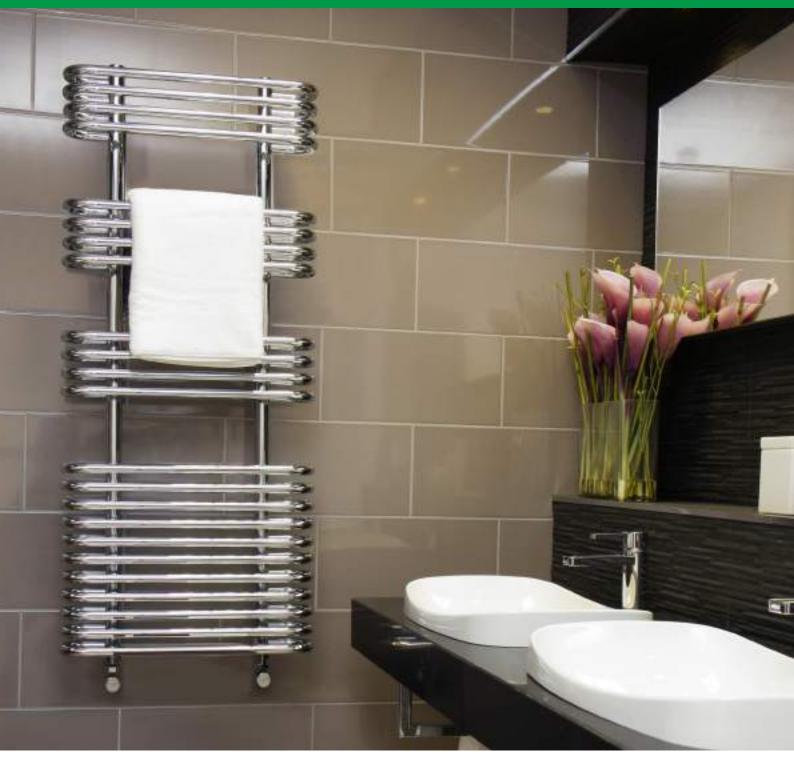

Cygnus is handsome and highly practical. The looped horizontal rails maximise both heat output and hanging space. Finished in chrome. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.



Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA

Cygnus	Dimensions (mm)			Bar	Pipe centres	Electric	Output	Output ∆⊺60°C	Stock or made
MS 15 C	Н	W	D	config	Centres	wattage	Watts/BTU's	BTU's	to order
DR012	900	500	170	4-4-10	300	150	417 / 1423	1804	\checkmark
DR012	1200	500	170	4-4-4-11	300	200	556 / 1897	2405	\checkmark

CYGNUS HARMONIQUE Wall Mounted DR032





A unique looped rail encompassing a vertical contemporary radiator adds a beautifully smooth and contemporary feel to any space. The coiled bars bring an intricacy whilst providing abundant towel hanging space. Finished in chrome. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.

For other valve options see page 148

Cygnus Harmonique		Dimens (mrr		Bar config	Pipe centres	Electric element wattage	Output ∆⊺50°C Watts/BTU's	Output ∆⊺60°C BTU's	Stock or made
MS 15 C			D			wattage	Watts/BTU's	BTU's	to order
DR032	1200	500	159-174	23	300	400	726 / 2477	3141	\checkmark

DRACO Wall Mounted DR015



Draco's equally spaced hooped tubes form an architectural shape. Perfect symmetry with centralised valves. Finished in chrome, a must for any modern setting. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.




Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA

Draco	Dimensions (mm)		(mm)	Bar config	Pipe centres	Electric	Output	Output ∆ T60°C	Stock or made
MS 15 C	Н	W	D	comg	Controo	wattage	Watts/BTU's	BTU's	to order
DR015	1000	500	160	9	86	125	236 / 805	1021	\checkmark
DR015	1300	500	160	13	86	150	272 / 928	1177	\checkmark

INTTRA Wall Mounted CN013

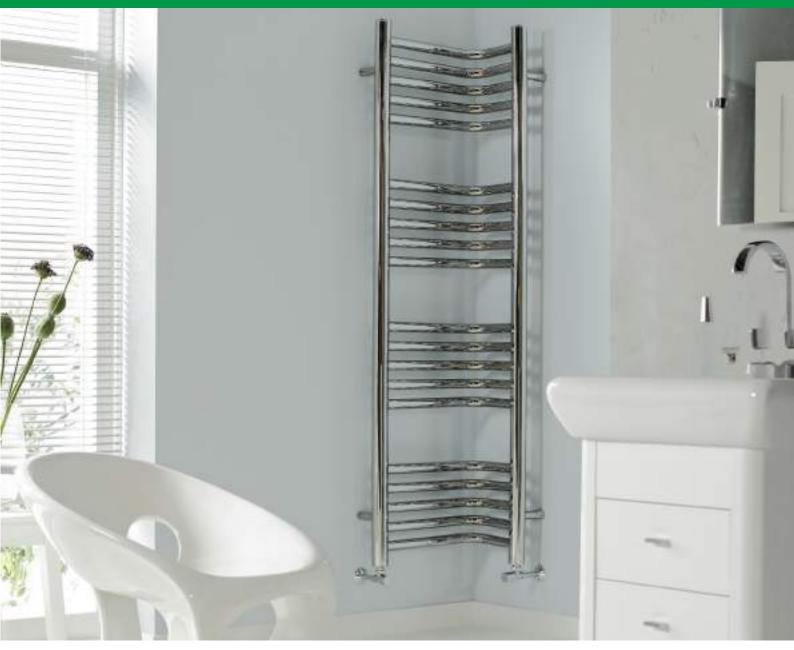

When space is limited... You still want good design and high heat output, the Inttra ticks all the boxes. The towel rail fits neatly into a corner to maximise wall space and is available in two sizes. Manufactured from large diameter brass or mild steel tube and chromed to a mirror finish. Bespoke finishes are available at an additional cost. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for central heating systems. Colour options for brass models only.

VL003 DE O Z 31.8 + 50.8mm For electric element & valve options see pages 144 & 148

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA

Inttra	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	Centres	element wattage	Watts/BTU's	∆ T60°C BTU's	or made to order
CN013-MS	1240	556	306	5-5-5	281 + 531	200	525 / 1791	2271	\checkmark
CN013-MS	1680	556	306	5-5-5-5	281 + 531	300	703 / 2399	3042	\checkmark
Inttra	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
Inttra BR 30 H	Dime H	ensions W	(mm) D	Bar config	Pipe Centres	Electric element wattage	Output ∆T50°C Watts/BTU's	Output ∆⊺60°C BTU's	Stock or made to order
						element	Δ T50°C	Δ T60°C	or made

FLEXX Wall Mounted CN015



Please note: Electric and dual energy versions come with a straight bottom bar.

Flexx is sensual and curvaceous. This handcrafted towel rail is an original design, with all the functionality a fabulous towel rail must have. Manufactured by craftsmen in high quality brass tube, chromed to a mirror finish. Please see pages 150 & 151 for finishes and colour

options. Prices shown are chrome finished for all heating and hot water systems.



Flexx	Dimensions		S (mm)	Bar	End to End	Electric	Output	Output	Stock or made
BR 30 H	н	W	D	config	Connections	element wattage	∆T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
CN015	1240	540	250	15	540	300	642 / 2191	2778	1

MANTTRA V Wall Mounted CN075



A simple yet sophisticated piece. With chunky tube creating a robust and full bodied appeal, the Manttra V will add a high quality and classy statement to your bathroom or en suite. Chromed to a mirror finish. Prices shown are chrome finished for all heating and hot water systems.



Manttra V	Dimensions (mm)			Bar config	Pipe centres	Electric element	Output ΔT50°C	Output ∆T60°C	Stock or made
MS 15 C	Н	W	D			wattage	Watts/BTU's	BTU's	to order
CN075	1240	500	125	14	449	200	408 / 1392	1765	\checkmark



Pure high quality elegance. This handcrafted towel rail is manufactured in brass and chromed to a mirror finish. Bespoke finishes are available at an additional cost. A perfect size for smaller areas where space is at a premium and quality a must. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for heating and hot water systems.



Pure	Dim	ensions	(mm)	Bar config	Pipe Centres	Electric element	Output ∆ T50°C	Output	Stock
BR 30 H	н	W	D	config	Centres	wattage	Watts/BTU's	∆ T60°C BTU's	or made to order
MD037	700	425	75	4	400	75	106 / 362	459	

Understated with great towel hanging functionality, Grace is the epitome of simple chic design.

Manufactured from large diameter high quality mild steel. Prices shown are chrome finished for central heating models.

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA





Grace					Pipe	Electric	Output ∆⊺50°C	Output	Stock
MS 15 C	Н	W	D	config	centres	element wattage	Watts/BTU's	∆ T60°C BTU's	or made to order
MD067	800	500	100	3	462	100	140 / 478	606	\checkmark
MD067	1200	500	100	4	462	125	199 / 679	861	\checkmark

SMOOTH Wall Mounted CN035



Smooth combines excellent towel hanging space with high heat output and eye catching design.

Manufactured from high quality mild steel. Prices shown are chrome finished for central heating systems models.

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



	Smooth	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
MS	s 15 C	Н	W	D	config	centres	element wattage	Watts/BTU's	∆ T60°C BTƯ's	or made to order
	CN035	800	400	94	9	368	100	163 / 556	705	\checkmark
	CN035	800	500	94	9	468	125	189 / 645	818	\checkmark
	CN035	1200	400	94	13	368	150	235 / 802	1017	\checkmark
	CN035	1200	500	94	13	468	150	271 / 925	1173	\checkmark

Smooth II is modern and stylish, featuring 38mm vertical tubes. Manufactured from high quality mild steel with mitred corners. Prices shown are chrome finished for central heating systems.

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



Smooth II	Dime	ensions	(mm)	Bar	Pipe centres	Electric element	Output ∆ T50°C	Output ∆ T60°C	Stock or made
MS 15 C	н	W	D	config	centres	wattage	Watts/BTU's	BTU's	to order
CN036	800	400	96	8	368	125	206 / 703	891	\checkmark
CN036	800	500	96	8	468	150	237 / 809	1026	\checkmark
CN036	1200	400	96	11	368	200	292 / 996	1263	\checkmark
CN036	1200	500	96	11	468	200	335 / 1143	449	



CHIC Wall Mounted MD046



Chic gives ultimate versatility allowing towels to be accessed from the side. This practical and stylish design is available chrome plated or in white. Manufactured from high quality mild steel which can be mounted to the left or right. Prices shown are chrome or white finished for central heating models.

Mild Steel Metallic Finish Supplements Gold - POA Bright Nickel - Chrome - POA

Brushed Nickel - Chrome - POA



Chic	Dimer	nsions	(mm)	Bar config	Pipe centres	Electric element		t ∆ ⊤50°C ;/BTU's	Out∣ ∆ T60°C		Stock or made
MS 15 C	Н	W	D			wattage	chrome	white	chrome	white	to order
MD046	1200	500	85	3-3-3- 3-3	100	150	282 / 962	377 / 1286	1220	1631	\checkmark

KEYS II Wall Mounted CN030



A contemporary, minimalist design with crisp clean lines. Keys II allows towels to be effortlessly hung onto the rails from the left or right hand side, depending on your requirements. Manufactured from high quality mild steel, chromed to a mirror finish. Prices shown are for central heating models. Stainless Steel version available on request

For electric element & valve options see pages 144 & 148

VL014

30sq + 40sq mm

Keys II	Dime	nsions	(mm)	Bar	Pipe	Electric	Output ∆	Output	Stock
MS 15 C	Н	W	D	config	Centres	element wattage	Watts/BTU's	∆⊺60°C BTU's	or made to order
CN030	1080	500	141	6	50	150	392 / 1338	1697	\checkmark
CN030	1460	500	141	8	50	200	524 / 1788	2267	\checkmark
CN030	1840	500	141	10	50	300	656 / 2238	2838	\checkmark

ZENITH Wall Mounted IN007



VL003

Zenith is manufactured in stainless steel and has a brushed or polished finish, suitable for all heating & hot water systems. Please see page 150 for colour options

Zenith	Dime	nsions	(mm)	Bar config	Pipe centres	Electric element	Output ∆ T50°C	Output ∆⊺60°C	Stock or made
SS 30 H	н	W	D			wattage	Watts/BTU's	BTU's	to order
IN007	1200	400	90	6	360	125	421 / 1436	1821	1

MODA Wall Mounted CN001

A few examples of the colours available



RAL 5009



RAL 3020



RAL 6027



RAL 4005



Moda is manufactured from high quality mild steel and finished in polished chrome with a white integral radiator. Please see pages 150 & 151 for finishes and colour options.



Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA

Moda	Dime	nsions	(mm)	Bar	Pipe	Electric element	Output	Output	Stock
MS 15 C	н	W	D	config	centres	wattage	∆⊤50°C Watts/BTU's	BTU's	or made to order
CN001	1200	500	150	5	310	300	787 / 2685	3405	

VISTA Wall Mounted IN002




Vista is sculptural with beautifully finished tactile edges. Manufactured from stainless steel and has a brushed or polished finish. Available in three lengths from 500mm, ideal for ensuites to 1500mm, perfect above a bath. Stainless steel suitable for all hot water systems. Please see page 150 for colour options



Vista	Dime	ensions	(mm)	Bar config	End to End Connections	Electric element	Output ∆⊤50°C	Output ∆⊤60°C	Stock or made
SS 30 H	Н	W	D			wattage	Watts/BTU's	BTU's	to order
IN002A	140	500	90	2	500	75	118 / 403	511	
IN002B	140	1000	90	2	1000	100	223 / 761	965	
IN002C	140	1500	90	2	1500	125	328 / 1119	1419	

MEMO Wall Mounted CN007

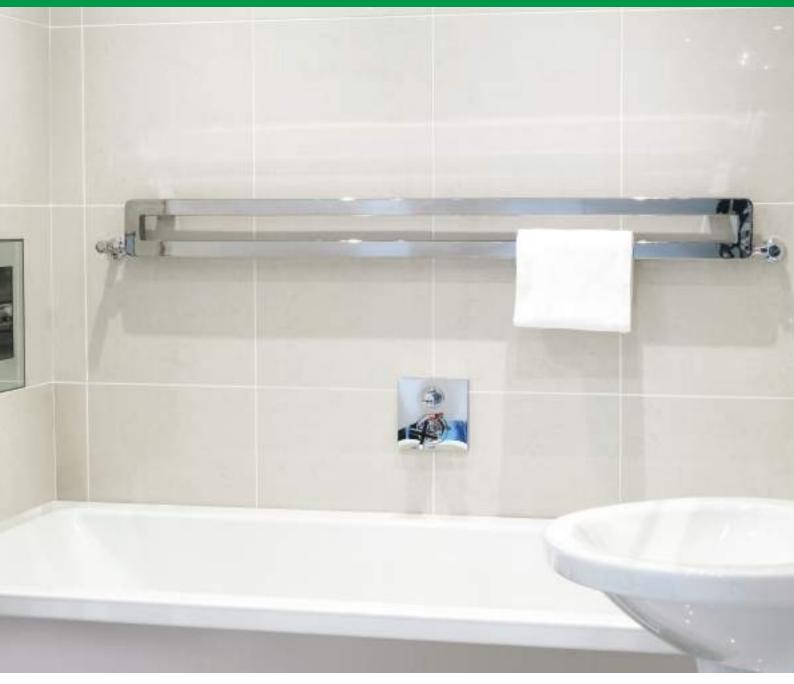

Simple and beautiful, this design comes in three different widths, the 500mm shortest width is perfect for areas where space is at a premium. Manufactured from high quality mild steel, chromed to a mirror finish. Prices shown are for central heating models. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for heating and hot water systems.



Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA

Memo	Dimensions (mm)		Bar	End to End	Electric	Output	Output	Stock	
MS 15 C	н	W	D	config	Connections	element wattage	∆ T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
CN007A	140	500	90	2	500	75	86 / 293	372	1
CN007B	140	1000	90	2	1000	100	171 / 583	739	2
CN007C	140	1500	90	2	1500	125	256 / 873	1107	2

QUADRATE Wall Mounted MD074



Quadrate has 50mm vertical tubes and crisp, sleek edges, which would suit any modern bathroom setting. Available in a range of heights and widths. Manufactured from high quality mild steel. Prices are for chrome central heating models.

—

800mm 9 cross bars 1200mm 14 cross bars 1600mm 19 cross bars

Mild Steel Metallic Finish Supplements Gold - POA

Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



Quadrate	Dim	nensions	\$ (mm)	Bar config	Pipe	Electric	Output	Output ∆ T60°C	Stock
MS 15 C	н	W	D	comig	centres	element wattage	Watts/BTU's	BTU's	or made to order
MD074	800	500	105	3-3-3	450	150	271 / 925	1173	\checkmark
MD074	800	600	105	3-3-3	550	200	310 / 1058	1342	\checkmark
MD074	1200	500	105	3-4-7	450	300	416 / 1419	1799	\checkmark
MD074	1200	600	105	3-4-7	550	300	477 / 1628	2064	\checkmark
MD074	1600	500	105	3-3-3- 5-5	450	400	561 / 1914	2427	\checkmark
MD074	1600	600	105	3-3-3- 5-5	550	600	645 / 2201	2791	\checkmark

A strikingly functional product that packs a punch with a high heat output, multiple crossbars for optimum towel hanging capabilities and a chic double panel radiator. The square tubing presents a fresh, contemporary feel for a bold and clean profile. Finished in chrome. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.





010		oo paga	00 1 1 1	0.110				1000		
	Quadrate Harmonique	Di	mens (mm)		Bar config	Pipe centres	Electric element	Output ∆⊤50°C	Output ∆ T60°C	Stock or made
	MS 15 C	Н	W	D			wattage	Watts/BTU's	BTU's	to order
	MD078	1200	500	105-120	7	450	400	1003 / 3422	4339	

Simple and beautiful, the rectangular stainless steel tube is built to last. The Rubik comes in polished stainless steel as standard. Please see pages 150 & 151 for finishes and colour options.

Stainless steel construction suitable for all hot water systems



1500mm

_	
_	

1200mm 22 cross bars 18 cross bars

800mm 12 cross bars



Rubik Dimensions (mm) Bar Pipe Output ∆ Output Stock Electric T50°C ∆ T60°C BTU's or made to order config 30 H SS Watts/BTU's Н D wattage W 1 MD038 800 500 80 3-6-3 470 200 404 / 1378 1747 3 MD038 1200 500 80 4-10-4 470 300 607 / 2071 2626 5 MD038 3232 1500 500 80 4-7-7-4 470 300 747 / 2549







Modern looks from this square tubed design brings together aesthetics and practicality. This versatile product will suit any modern bathroom. Chromed to a mirrored or anthracite finish. Prices shown are for central heating models.







830mm

14 cross bars

1770mm 29 cross bars

1322mm 22 cross bars



Anthracite Textured finish option

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA





Squire	Dim	nensions (mm)		Bar config	Pipe centres			LΔT50°C /BTU's	Output ∆ т60°C BTU's		Stock or made
MS 15 C	Н	W	D			wattage	chrome	painted	chrome	painted	to order
MD047	830	480	90	4-10	450	150	278 / 949	416 / 1419	1203	1799	\checkmark
MD047	830	580	90	4-10	550	200	331 / 1129	495 / 1689	1432	2142	\checkmark
MD047	1322	480	90	4-8-10	450	300	440 / 1501	656 / 2238	1903	2838	\checkmark
MD047	1322	580	90	4-8-10	550	300	523 / 1784	780 / 2661	2262	3374	\checkmark
MD047	1770	480	90	4-7-8-10	450	400	581 / 1982	868 / 2962	2513	3756	\checkmark
MD047	1770	580	90	4-7-8-10	550	600	691 / 2358	1032 / 3521	2990	4465	

SERENE Wall Mounted MD049



The Serene is just that. A well balanced design which maximises hanging space. A perfect towel warmer for contemporary kitchens and bathrooms alike. Square tubes finished with a choice of chrome or contemporary finishes. Please see page 150 for other colour options. Prices shown are for central heating models.

			11
			11
	 		11
	 		11
			11
	 		1
			11
			1
			J
_			11
	 		11
			11
			Ш
			11
			1
			Ш
			1
	 		11
	_	_	11
			11
			ł
			11
			1
			1
			11
			-

_	
1	
1	
4 1	
1	
1	
1	
1	

1700mm 20 cross bars 1165mm 15 cross bars

1000mm 12 cross bars

Mild Steel Metallic Finish Supplements Gold - POA


Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



Serene		Dir	nensic (mm)	ons	Bar config	Pipe centres	Electric element		tput /atts/BTU's	Out ∆⊤60°C		Stock or made to order
MS 15 C	Н	W	D			wattage	chrome	painted	chrome	painted	to order	
	MD049	1000	500	85	12	470	150	257 / 877	409 / 1396	1112	1770	\checkmark
	MD049	1165	500	85	15	470	200	314 / 1071	420 / 1433	1358	1817	\checkmark
	MD049	1165	600	85	15	570	300	365 / 1245	437 / 1491	1579	1891	\checkmark
	MD049	1700	500	85	20	470	300	434 / 1481	501 / 1709	1878	2167	\checkmark
	MD049	1700	600	85	20	570	400	520 / 1774	601 / 2051	2249	2601	\checkmark

A contemporary, minimalist design. With crisp edges and clean lines. The Ideal is manufactured in high quality stainless steel which is polished to perfection.

Stainless steel construction is suitable for all hot water systems.



1500mm 10 cross bars 1200mm 8 cross bars 900mm 6 cross bars





Ideal	Dime	Dimensions (mm)			Pipe	Output	Output	Electric	Stock
SS 30 F	н	W	D	config	Centres	∆T50°C Watts/BTU's	∆ T60°C BTU's	element wattage	or made to order
MD055	900	500	100	6	470	281 / 959	1216	100	\checkmark
MD055	1200	500	100	8	470	375 / 1280	1623	125	\checkmark
MD055	1500	500	100	10	470	469 / 1600	2029	150	\checkmark

BOXA Wall Mounted CN009



Boxa is crafted using large gauge square and rectangular tubing and has smooth rounded corners. A perfect blend of form and function. There are two options, polished stainless steel or chromed mild steel. Available in three heights to suit the size of your room.

Prices shown are for chrome and polished stainless steel models. Please see pages 150 & 151 for finishes and colour options.

Mild Steel Metallic Finish Supplements Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



Boxa	Dime	nsions	6 (mm)	Bar config	Pipe centres	Electric element	Output	Output	Stock or made
MS 15 C	Н	W	D	Josing		wattage	Watts/BTU's	BTU's	to order
CN009A - MS	620	450	120	3	410	100	199 / 679	861	\checkmark
CN009B - MS	1060	450	120	5	410	150	290 / 989	1254	\checkmark
CN009C - MS	1500	450	120	7	410	150	437 / 1491	1891	\checkmark
Boxa	Dime	nsions	(mm)	Bar config	Pipe centres	Electric	Output ∆ T50°C	Output	Stock
Boxa SS 30 H	Dime H	nsions W	(mm) D	Bar config	Pipe centres	Electric element wattage		Output ∆⊺60°C BTU's	Stock or made to order
						element	Δ T50°C	Δ T60°C	or made
SS 30 H	Н	W	D	config	centres	element wattage	∆ T50°C Watts/BTU's	∆ T60°C BTU's	or made to order

ARC Wall Mounted MD065

Arc has it all, ample towel hanging space and good heat output. Available in chrome to suit your ideal kitchen or bathroom. Manufactured from high quality mild steel. Prices shown are for central heating models in a chrome finish.



Unique bar design

]] م		
Aeri	al view	
	1=1	
		т Т
а – – – 328mm	1200mm	1800mm

Mild Steel Metallic Finish Supplements

15 cross bars

21 cross bars

Gold - POA Bright Nickel - Chrome - POA

10 cross bars








GALLANT Wall Mounted MD040SS




Crafted in high quality stainless steel. The Gallant is a bold stylish piece offering crisp right angles to stunning effect. Available in two heights in polished stainless steel, suitable for all hot water systems.

Please see page 150 for colour options



1200mm 11 cross bars




900mm 8 cross bars



Gallant		Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
	SS 30 H	Н	W	D	config	Centres	element wattage	∆T50°C Watts/BTU's	∆ T60°C BTƯ's	or made to order
	MD040SS	900	500	97	2-2-4	440	200	458 / 1563	1982	*
	MD040SS	1200	500	97	2-2-3-4	440	300	624 / 2129	2700	

The square tubed design brings together aesthetics and practicality. This versatile product will suit any modern bathroom. Chromed to a mirrored finish. Prices shown are for central heating models.





1270mm 15 cross bars 970mm 12 cross bars

Mild Steel Metallic Finish Supplements


Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA





Gallant II	Dime	ensions	(mm)	Bar	Pipe Centres	Electric element	Output	Output	Stock
MS 15 C	Н	W	D	config	Centres	wattage	Watts/BTU's	BTU's	to order
MD040MS	970	500	132	3-4-5	450	200	296 / 1010	1281	\checkmark
MD040MS	1270	500	132	3-5-7	450	300	363 / 1239	1571	

AQUILA Wall Mounted DR016

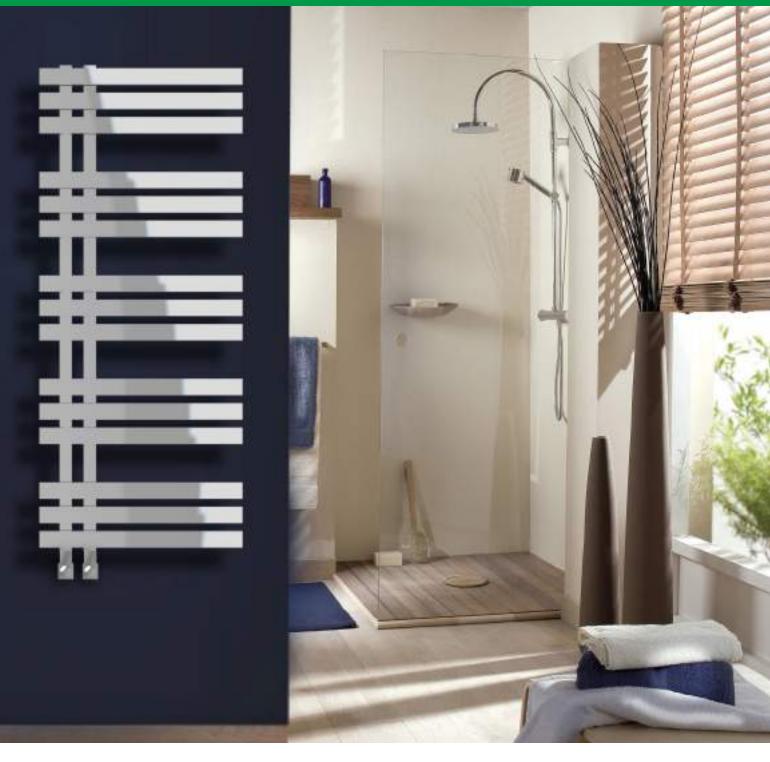

Rectangular tube towel rail provides ample space and heat for warming or drying towels, in a design which allows you to slide them effortlessly into place from either the left or right, depending on your preference. Manufactured from high quality mild steel, prices shown are chrome finished for central heating models.



Aquila	Aquila Dimensio		(mm)	Bar	Pipe	Electric	Output	Output ∆ T60°C	Stock
MS 15 C	Н	W	D	- config	centres	element wattage	Watts/BTU's	BTU's	or made to order
DR016	1200	500	118	3-3-3-3-3	60	150	354 / 1208	1532	\checkmark
DR016	1400	600	118	3-3-3-3- 3-3	60	200	436 / 1488	1887	\checkmark

PHOENIX Wall Mounted DR017



Asymmetric rectangular tube towel rails give a fascinating design that has clean lines and simple access from either side. Manufactured from high quality mild steel, prices shown are chrome finished for central heating models.



Phoenix	Dime	ensions	(mm)	Bar	Pipe		Output	Output	Stock or made
MS 15 C	Н	W	D	config	centres	element wattage	∆T50°C Watts/BTU's	BTU's	to order
DR017	1200	500	118	3-3-3- 3-3	60	150	301 / 1027	1302	\checkmark

CURVEE Wall Mounted MD050

Curvee is stylish and practical. As the name suggests the cross rails are gently bowed. The towel rail offers good heat output in four sizes, the 800mm version is pictured. Available in chrome or white finish. Please see page 150 for colour options Prices shown are chrome finished for central heating models.





1100mm 20 cross bars

800mm 15 cross bars

Curved Bars



Mild Steel Metallic Finish Supplements Gold - POA Brushed Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA





Curvee	Dimensions (mm)		Bar config	Pipe centres		Output ∆⊤50°C Watts/BTU's		Output ∆⊺60°C BTU's		Stock or made	
MS 15 C	Н	W	D			wattage	chrome	painted	chrome	painted	to order
MD050	800	500	96	4-11	455	125	235 / 802	543 / 1853	1017	2350	\checkmark
MD050	800	600	96	4-11	555	150	274 / 935	556 / 1897	1186	2405	\checkmark
MD050	1100	500	96	4-6-10	455	200	316 / 1078	583 / 1989	1367	2522	\checkmark
MD050	1100	600	96	4-6-10	555	300	387 / 1320	587 / 2003	1674	2540	\checkmark

VELA Wall Mounted MD048



Rectangular crossbars give a solid feel to this design. Available in two sizes finished in your choice of chrome, white or a contemporary colour of your choice from the swatches (above). Prices shown are for central heating models. Please see page 150 for other colour options.

Mild Steel Metallic Finish Supplements
Gold - POA
Bright Nickel - Chrome - POA
Brushed Nickel - Chrome - POA

For electric element & valve options see pages 144 & 148

60 x 10mm

(E)

D)

8

VL003


⊢		_	_	_	-1
					_
					-
	_	_	_	_	
			_	_	
⊢	_	_	_	_	-1
					-
	-	-	-	-	-
					_
⊢		_	_	_	-1
					-

1
l
l
 l
l
l
 l
 l

1300mm 13 cross bars 950mm 9 cross bars

Output ∆ T50°C Watts/BTU's Output ∆T60°C BTƯ's Dimensions Bar Pipe Stock Vela Electric (mm) config centres or made to order element wattage MS 15 W D Н MD048 246 / 839 289 / 986 1064 1250 101 950 500 2-3-4 462 125 MD048 1683 1300 500 200 330 / 1126 389 / 1327 1428 101 3-5-5 462

DÉCOR Wall Mounted MD084

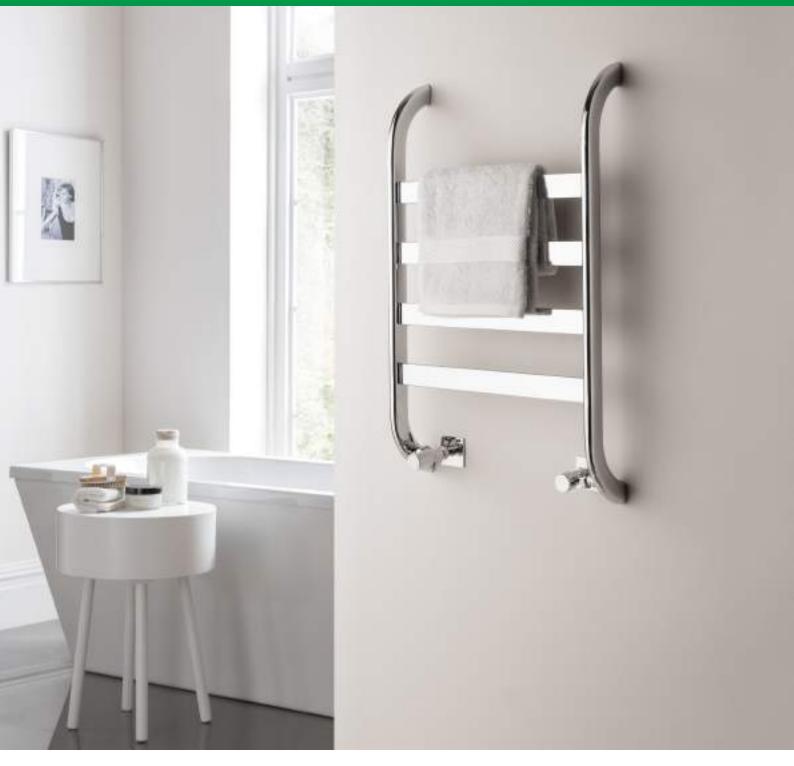

A memorable design, available in two sizes. Suitable for any modern bathroom. Chromed to a mirror finish. Prices shown are for central heating models.



Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA

Décor	Dime	ensions	(mm)	Bar	Face to Face	Output Δ T50°C	Output ∆⊺60°C	Stock	
MS 15 C	Н	W	D	config	connections	Watts/BTU's	BTU's	or made to order	
MD084	750	450	145	4	388	129 / 440	558	\checkmark	
MD084	1200	450	145	6	388	199 / 679	861	\checkmark	

DÉCOR HARMONIQUE Wall Mounted MD094





Our Décor Hamonique - style combination towel warmer, with flat horizontal bars and a contemporary double panel radiator designed for high heat output. It's modern sleek looks bring an air of sophistication to any setting. Manufactured from high quality mild steel in a chrome finish. Prices shown are chrome finish for central heating models.

Décor Harmonique	Dimensions (mm)		Bar config	Face to Face	Electric element wattage	Output ∆⊺50°C Watts/BTU's	Output ∆T60°C	Stock or made to order	
MS 15 C	н	W	D		connections	wattage	vvatts/BTU's	BTU's	to order
MD094	1200	500	159	4	442	200	842 / 2873	3643	\checkmark

UNIQUE Wall Mounted CN028



Contemporary Towel Warmer with cylindrical features. Made from high quality mild steel. Prices shown are chrome finished for central heating models.



For electric element & valve options see pages 144 & 148

Mild Steel Metallic Finish Supplements Gold - POA

Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA

Unique	Dimensions (mm)		Bar config	Pipe centres	Electric element	Output ∆T50°C	Output ∆ T60°C	Stock	
MS 15 C	Н	W	D	comg	centres	wattage	Watts/BTU's	BTU's	or made to order
CN028	950	500	90	4	460	125	155 / 529	671	\checkmark

Venture is available in three widths and four heights, with spacious hanging bars. The bold jointed design suits contemporary interiors. Manufactured from high quality brass, chromed to a mirror finish. Please see pages 150 & 151 for finishes and colour options.





Venture	Dime	ensions	5 (mm)	Bar	Pipe	Electric	Output	Output	Stock
BR 30 H	Н	W	D	config	Centres	Element Wattage	∆T50°C Watts/BTU's	∆⊤60°C BTƯ's	or made to order
CN022	750	450	95	4	400	75	121 / 413	524	\checkmark
CN022	850	650	95	4	600	100	157 / 536	680	
CN022	1300	500	95	6	450	125	206 / 703	891	2
CN022	1300	650	95	6	600	125	240 / 819	1038	2
CN022	1600	500	95	8	450	150	267 / 911	1155	2
CN022	1600	650	95	8	600	150	312 / 1065	1350	2

VIVID Wall Mounted CN021



Vivid is a beautiful minimalistic towel warmer, manufactured from high quality brass. Prices shown are for chrome heating and hot water systems. Please see pages 150 & 151 for finishes and colour options.



Mitred Joint



Vivid	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output ∆⊺60°C BTU's	Stock
BR 30 H	Н	W	D	config	Centres	Element Wattage	Watts/BTU's		or made to order
CN021	750	450	93	4	400	75	121 / 413	524	\checkmark
CN021	800	650	93	4	600	100	154 / 525	666	
CN021	1250	500	93	6	450	125	201 / 686	870	\checkmark
CN021	1250	650	93	6	600	125	235 / 802	1017	
CN021	1550	500	93	8	450	150	258 / 880	1116	2
CN021	1550	650	93	8	600	150	303 / 1034	1311	2

VIVID INTEGRAL VALVE Wall Mounted IVCN021




Standard installation with visible valve.



Integral valve is hidden within the towel rail.







Vivid IV has all the stunning looks of Vivid with the added feature of built in integral valves. Manufactured from high quality brass with a chrome mirror finish. Prices shown are for chrome heating and hot water systems. This radiator is also available on previous page with standard valves. Please see pages 150 & 151 for finishes and colour options. Pipe work is hidden in the wall. Supplied with service valves, which must be fitted on installation. Not suitable for brick walls.

Ø 25.4mm								
Vivid Integral Valve	Dime	ensions	; (mm)	Bar config	Pipe centres	Output ∆⊺50°C	Output ∆⊺60°C	Stock or made
BR 30 H	Н	W	D			Watts/BTU's	BTU's	to order
IVCN021	700	500	94	4	450	138 / 471	597	2
IVCN021	1100	500	94	5	450	189 / 645	818	
IVCN021	1400	500	94	6	450	232 / 792	1004	

VIVID INTEGRAL VALVE Wall Mounted IVCN021



Vivid IV 400 x 1200 is the ideal choice over a bath or underneath a window. The single bar versions are perfect for ensuites and small spaces. Manufactured from high quality brass with built in valves. Prices shown are chrome finished for all heating and hot water systems. Please see pages 150 & 151 for finishes and colour options. Pipe work is hidden in the wall. Supplied with service valves, which must be fitted on installation . Not suitable for brick walls.




SIMPLICITY INTEGRAL VALVE Wall Mounted IVCN026

Simple and beautiful, this design manufactured from high quality brass, is perfect at the side of a shower. Prices shown are chrome finished for all heating and hot water systems. Please see pages 150 & 151 for finishes and colour options. Pipe work is hidden in the wall. Supplied with service valves, which must be fitted on installation . Not suitable for brick walls.



Robe or Towel Hook



Compression nut and piping



Ø 25.4mm

Simplicity Integral	Dimen	Dimensions (Bar config	Pipe centres	Output ∆⊤50°C	Output ∆T60°C	Stock or made
BR 30 H	н	W	D	comg	Centres	Watts/BTU's	BTU's	to order
IVCN026	1700	50	115	1	1625	75 / 256	325	2

CARINA Wall Mounted MD051



Mild Steel Metallic Finish Supplements

Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



Carina offers curves that work perfectly with the bold tubular design. The towel rail maximises storage space with a top shelf. Finished in chrome to match your sanitaryware. Style and versatility for the most contemporary of settings. Manufactured from high quality mild steel. Prices shown are chrome finished for central heating models.

Carina	Dimensions _(mm)			Bar config	Face to Face	Electric element	Output ∆T50°C	Output ∆T60°C	Stock or made to order
MS 15 C	Н	W	D		connections	wattage	Watts/BTU's	BTU's	to order
MD051	1200	500	225	8	422	125	223 / 761	965	\checkmark
MD051	1200	600	225	8	522	150	243 / 829	1051	\checkmark

SOLO and BINARY Wall Mounted TR001 / TR002



The Solo and Binary are perfect for situations where space is at a premium and style is of priority. This clever design allows you to stack, roll or hang your towels, so they are always warm, dry and handy. Manufactured from quality brass or mild steel and chromed to a mirror finish. Bespoke finishes are available at an additional cost. Please see page 150 for colour options Prices shown are chrome finished for central heating models.



Mild Steel Metallic Finish Supplements Gold - POA Bright Nickel - POA Brushed Nickel - POA



Solo and Binary	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	Centres	wattage	Watts/BTU's	BTU's	or made to order
TR001-MS	265	500	315	5	425	50	97 / 331	420	\checkmark
TR002-MS	274	500	315	9	425	75	155 / 529	671	\checkmark
Solo and Binary	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
Solo and Binary BR 30 H	Dime H	ensions W	(mm) D	Bar config	Pipe Centres	Electric element wattage	Output ∆T50°C Watts/BTU's	Output ∆⊺60°C BTU's	Stock or made to order
						element	∆ T50°C	∆ T60°C	or made

COMBY Wall Mounted MD052





Comby is designed to provide completely adaptable towel hanging and storage space. Towels in use can be hung over the cross rails to dry, clean towels placed on the folding shelf. Chromed to a mirror or white painted finish. Prices shown are for central heating models.

Comby	Dim	Dimensions (mm)			Pipe centres	Electric element	Output ∆ T50°C Watts/BTU's		Output ∆ T60°C BTU's		Stock or made to order
MS 15 C	Н	W	D			wattage	Chrome	White	Chrome	White	
MD052	1200	500	85-110	25	455	300	377 / 1286	507 / 1730	1631	2194	\checkmark
MD052	1200	600	85-110	25	555	300	452 / 1542	683 / 2330	1955	2954	\checkmark

HARMONIQUE DUO Wall Mounted MD090



A modern chrome multirail towel warmer with folding shelf combined with a white double panel radiator giving high heat output and drying in a combined unit. Inset radiator available in other radiator RAL colours, Please see page 150 for colour options Manufactured from mild steel, suitable for closed heating systems and with a 15 year guarantee. Dual fuel and sealed electric element options available.

VL003 DE O Ø 40 x 30 D Section + 22mm

Harmonique Duo	Dime	ension	S (mm)	Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	centres	element wattage	∆⊺50°C Watts/BTU's	∆⊤60°C BTU's	or made to order
MD090	1200	500	104	25	455	300	850 / 2900	3677	\checkmark
MD090	1200	600	104	25	555	300	1170 / 3992	5062	\checkmark

IERI Wall Mounted TM014



TM014-MS

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA Brushed Nickel - Chrome - POA



D

E e @ Ø 32 + 25 + 19mm @ Ø 25.4 + 22mm

For electric element & valve options see pages 144 & 148



Please note shelf location may vary when electric model specified


The integrated shelf in this curvaceous design has the added benefit of towel stacking as well as plentiful hanging space. Available in two height options to suit your space with an alternative shelf position which is optional on point of order. Manufactured from high quality brass or mild steel and chrome finished, with bespoke finishes available at an additional cost. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for central heating models.

101	it a valvo optione coo	pageo i		, ,						
	leri MS	Dime	nsions	(mm)	Bar config	Pipe centres	Electric element	Output ∆⊤50°C	Output	Stock or made
	MS 15 C	Н	W	D	comy	centres	wattage	Watts/BTU's	BTU's	to order
	TM014-MS	750	525	265	5	240	100	173 / 590	748	\checkmark
	TM014-MS	1350	525	265	8	240	200	277 / 945	1198	\checkmark
	leri	Dim	ension	S (mm)	Bar config	Face to Face	Electric	Output	Output	Stock
	BR 30 H	н	W	D	comy	connections	wattage	Watts/BTU's	BTU's	to order
	TM014	750	500	265	4	375	100	219 / 747	947	2
	TM014	1350	500	265	7	375	200	329 / 1123	1424	

HARMONIQUE Wall Mounted MD060

A perfect combination for heating and drying. This versatile product will suit any modern bathroom. With a white double panelled radiator as standard and 25mm chrome horizontal tubes.

Other radiator colours can be specified Please see page 150 for colour options Prices shown are for central heating models.





1200 x 500mm 7 Sections

1200 x 600mm 10 Sections



1500 x 500mm 7 Sections 1500 x 600mm 10 Sections

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA



Harmonique	Dim	ensions	(mm)	Bar config	Pipe centres	Electric	Output ∆⊤50°C	Output ∆ T60°C	Stock
MS 15 C	н	W	D	comig	centres	wattage	Watts/BTU's	BTU's	to order
MD060	1200	500	107	3-3-3	464	300	834 / 2846	3609	\checkmark
MD060	1200	600	107	3-3-3	564	400	1033 / 3525	4470	\checkmark
MD060	1500	500	107	3-3-3-3	464	400	1145 / 3907	4954	\checkmark
MD060	1500	600	107	3-3-3-3	564	400	1438 / 4906	6221	\checkmark



ANTI COPTING IN DESIGN

NEXUS III Wall Mounted TM001



High heat output from a radiator combined with a stylish brass frame makes the perfect combination of heat, good looks and versatility to enhance any bathroom or utility room. Prices shown are for central heating models. The inset radiator comes in white as standard. Please see pages 150 & 151 for finishes and colour options applicable to the tubular frame only. Please Note: The colour option does not apply to the inset radiator.



Nexus III	Dimensions (mm)			Bar	Pipe	Output		Electric	Stock
BR 30 C	Н	W	D	config	Centres	∆ T50°C Watts/BTU's	∆ T60°C BTU's	element wattage	or made to order
TM001	900	525	142	6	500	716 / 2443	3098	400	\checkmark

NEXUS IV Wall Mounted TM002





The contemporary version of the Nexus Grand (Pages 102 & 103) is manufactured in brass framework and chrome finished. Prices shown are for central heating models. The inset radiator comes in white as standard. Please see pages 150 & 151 for finishes and colour options applicable to the tubular frame only. Please Note: The colour option does not apply to the inset radiator.

Nexus IV	Dime	ensions	S (mm)	Bar	Pipe	Electric element	Output		Electric element	Stock
BR 30 C	Н	W	D	config	Centres	wattage	Watts/BTU's	∆T60°C BTU's	wattage	or made to order
TM002	900	590	214	3	500	400	689 / 2351	2981	400	\checkmark

SESTO RONDO III Wall Mounted MD021



The devil is always in the detail... Sesto Rondo's handsome curves and elegant straight lines are designed to maximise hanging space. Brass manufactured with a chrome finished as standard. Bespoke finishes are available at an additional cost. Please see pages 150 & 151 for finishes and colour options.



Features Luxury Air Vent



Sesto Rondo III						Electric	Output ∆⊤50°C	Output	Stock
BR 30 H	н	W	D	config	centres	element wattage	Watts/BTU's	∆⊺60°C BTƯ's	or made to order
MD021	820	507	167	21	475	150	339 / 1157	1467	

Something a bit different. A contemporary multirail, with protruding bars for extra towel hanging space. Prices shown are chromed finish for central heating models.





Tempo	Dim	ension	S (mm)	Bar	Pipe centres	Electric	Output ∆⊺50°C	Output ∆ T60°C	Stock
MS 15 C	Н	W	D	config	centres	element wattage	Watts/BTU's	BTU's	or made to order
MD072	800	500	170-190	19 + 9	455	150	416 / 1419	1799	\checkmark
MD072	1160	500	170-190	25 + 12	455	300	592 / 2020	2561	\checkmark



be fident

V©GUE Ladder Rails


The Ladder style towel rail... High heat output and towel hanging space in an efficient format. Vogue UK have an extensive offering for this benchmark range of products.

Clean designs to suit modern bathrooms...



AXIS 22mm Wall Mounted MD062

Our Axis offers adjustable brackets through the crossbars also offer freedom and ease of installation. Offering a copious amount of rails for optimum efficiency, this contemporary rail is a modern example of proficient design... Prices shown are for chrome finish, central heating models.

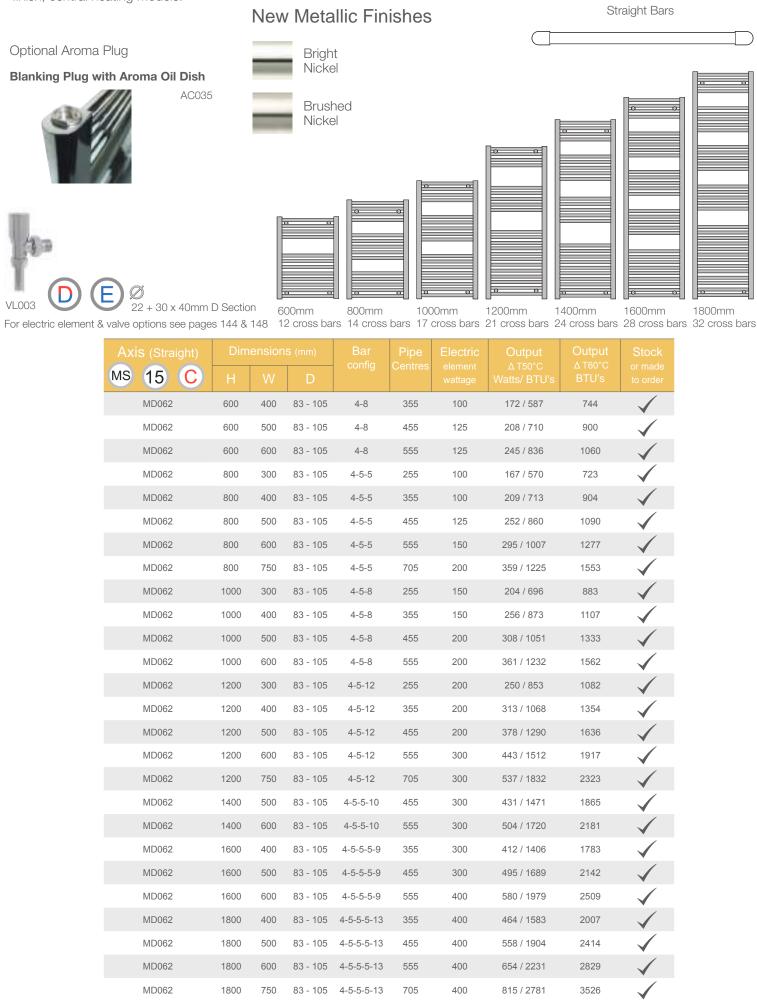



COMBES 22mm Wall Mounted MD063


Our Combes offers adjustable brackets through the crossbars also offer freedom and ease of installation. Offering a copious amount of rails for optimum efficiency, this contemporary rail is a modern example of proficient design... The curved version of our MD062. Prices shown are for chromed finish, central heating models.



AC035

Optional Aroma Plug Blanking Plug with Aroma Oil Dish






1800mm

1600mm

1400mm 32 cross bars 28 cross bars 24 cross bars



1200mm

1000mm 800mm

600mm 21 cross bars 17 cross bars 14 cross bars 12 cross bars



22 + 30 x 40mm D Section

Combes (Curved)	Din	nensions		Bar config	Pipe Centres		Output ∆⊤50°C	Output ∆ T60°C	Stock or made
MS 15 C	Н		D	ooning	Controo				to order
MD063	800	500	89 - 119	4-5-5	455	150	252 / 860	1090	\checkmark
MD063	800	600	95 - 125	4-5-5	555	150	295 / 1007	1277	\checkmark
MD063	1000	500	89 - 119	4-5-8	455	200	308 / 1051	1333	\checkmark
MD063	1000	600	95 - 125	4-5-8	555	200	361 / 1232	1562	\checkmark
MD063	1200	500	89 - 119	4-5-12	455	200	378 / 1290	1636	\checkmark
MD063	1200	600	95 - 125	4-5-12	555	300	443 / 1512	1917	\checkmark
MD063	1400	500	89 - 119	4-5-5-10	455	300	431 / 1471	1865	\checkmark
MD063	1400	600	95 - 125	4-5-5-10	555	300	504 / 1720	2181	\checkmark
MD063	1600	500	89 - 119	4-5-5-5-9	455	300	495 / 1689	2142	\checkmark
MD063	1600	600	95 - 125	4-5-5-5-9	555	400	580 / 1979	2509	\checkmark
MD063	1800	500	89 - 119	4-5-5-5-13	455	400	558 / 1904	2414	\checkmark
MD063	1800	600	95 - 125	4-5-5-5-13	555	400	654 / 2231	2829	\checkmark



FOCUS 25mm Wall Mounted MD001



The Focus is a range of 25mm horizontal tube design towel rails. Giving high heat output and superior looks. Manufactured from high quality mild steel with smooth flat tops and rear air vent. Prices shown are for chrome and white central heating models.


Available in other contemporary colours please see page 67 onwards. Please see page 150 for other colour options.

New Metallic Finishes



Bright Nickel

Brushed Nickel



For electric element & valve options see pages 144 & 148

	Focus	Dimensions (mm)		s Bar Electric config element wattage		Watts/BTU's		Out∣ ∆⊺60°C		Stock or made	
MS	15 C	Н	W	D			chrome	white	chrome		to order
	MD001	800	300	93-113	3-5-6	100	177 / 604	271 / 925	766	1173	\checkmark
	MD001	800	400	93-113	3-5-6	125	226 / 771	346 / 1181	978	1498	\checkmark
	MD001	800	500	93-113	3-5-6	150	275 / 938	420 / 1433	1189	1817	\checkmark
	MD001	800	600	93-113	3-5-6	200	324 / 1105	495 / 1689	1401	2142	\checkmark
	MD001	1000	500	93-113	4-5-9	200	351 / 1198	446 / 1522	1519	1930	\checkmark
	MD001	1000	600	93-113	4-5-9	200	414 / 1413	510 / 1742	1792	2209	\checkmark
	MD001	1200	300	93-113	4-5-13	200	273 / 931	424 / 1447	1181	1835	\checkmark
	MD001	1200	400	93-113	4-5-13	200	350 / 1194	543 / 1853	1514	2350	\checkmark
	MD001	1200	500	93-113	4-5-13	300	428 / 1460	663 / 2262	1851	2868	\checkmark
	MD001	1200	600	93-113	4-5-13	400	505 / 1723	783 / 2672	2185	3388	\checkmark
	MD001	1500	500	93-113	4-5-7-12	300	534 / 1822	820 / 2798	2310	3548	\checkmark
	MD001	1500	600	93-113	4-5-7-12	400	631 / 2153	969 / 3306	2730	4192	\checkmark
	MD001	1800	400	93-113	4-5-12-13	400	521 / 1778	793 / 2706	2255	3431	\checkmark
	MD001	1800	500	93-113	4-5-12-13	600	638 / 2177	969 / 3306	2760	4192	\checkmark
	MD001	1800	600	93-113	4-5-12-13	600	754 / 2573	1146 / 3910	3263	4958	\checkmark

Image shown with VL015 valves


CHORUS 25mm Wall Mounted MD002

The curved version of the Focus. The Chorus has all the same attributes with high heat output and superb looks. Prices shown are for chrome or white central heating models. Please see page 150 for other colour options.



Rear Air Vent Capped off smooth ends for aesthetic appeal and ease of installation.





1500mm 28 cross bars





1800mm

34 cross bars

800mm 14 cross bars



18 cross bars

1200mm 22 cross bars

Curved Bars

VL003 25 + 30 x 40mm D Section


For electric element & valve options see pages 144 & 148



Image shown with VL015 valves

Chorus	Dimensions (mm)		Bar config	Pipe centres	Electric element wattage	Output ∆ т50°C Watts/BTU's		Output ∆⊤60°C BTU's		Stock or made	
MS 15 C	Н	W	D				chrome	white	chrome	white	
MD002	800	500	88-108	3-5-6	455	150	275 / 938	420 / 1433	1189	1817	\checkmark
MD002	800	600	94-114	3-5-6	555	200	324 / 1105	495 / 1689	1401	2142	\checkmark
MD002	1000	500	88-108	4-5-9	455	200	351 / 1198	-	1519	-	\checkmark
MD002	1000	600	94-114	4-5-9	555	200	414 / 1413	-	1792	-	\checkmark
MD002	1200	500	88-108	4-5-13	455	300	428 / 1460	663 / 2262	1851	2868	\checkmark
MD002	1200	600	94-114	4-5-13	555	400	505 / 1723	783 / 2672	2185	3388	\checkmark
MD002	1500	500	88-108	4-5-7-12	455	300	534 / 1822	820 / 2798	2310	3548	\checkmark
MD002	1500	600	94-114	4-5-7-12	555	400	631 / 2153	969 / 3306	2730	4192	\checkmark
MD002	1800	500	88-108	4-5-12-13	455	600	638 / 2177	969 / 3306	2760	4192	\checkmark
MD002	1800	600	94-114	4-5-12-13	555	600	754 / 2573	1146 / 3910	3263	4958	\checkmark


FOCUS HORIZONTAL 25mm Wall Mounted MD001H

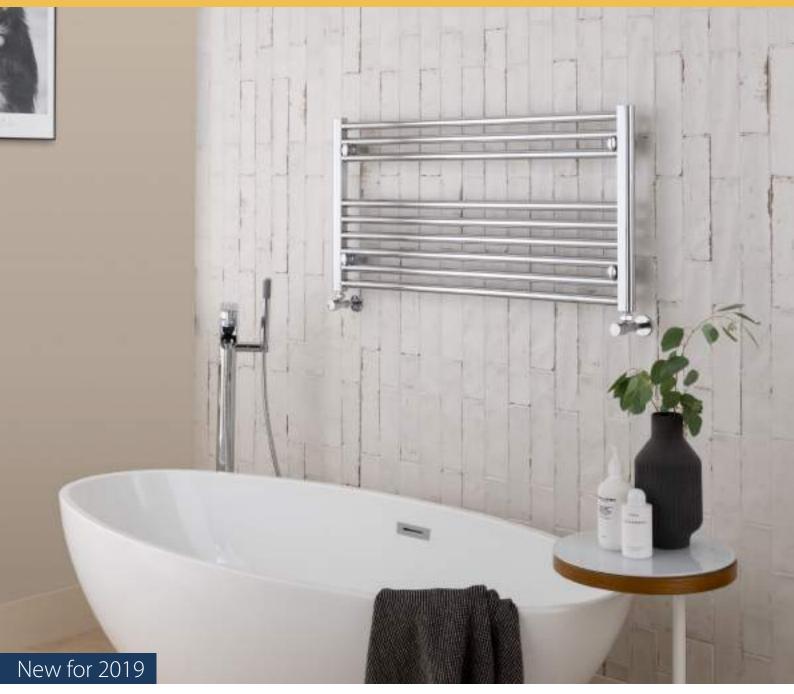

The horizontal version of the Focus. Allowing you to hang towels side by side and a perfect fit for underneath a window or shelf, our Focus horizontal is a smart alternative to the typical ladder- rail style. With all the same attributes, high heat output and superb looks. Prices shown are for chrome or Anthracite central heating models. Please see page 150 for other colour options.







9 cross bars

_	
L	
~	
6	()()mm
U	00mm


10 cross bars

VL003 25 + 30 x 40mm D Section For electric element & valve options see pages 144 & 148

	Focus	s Horizontal	Dimensions (mm)		Bar config	Pipe centres		Output ∆ T50°C Watts/BTU's		Output ∆ T60°C BTU's		Stock or made to order	
	MS	15 C		W	D						chrome		
		MD001H	400	1000	93-113	3-4	955	100	200 / 682	302 / 1030	865	1306	\checkmark
		MD001H	500	1000	93-113	3-6	955	125	256 / 873	386 / 1317	1107	1670	\checkmark
		MD001H	600	1000	93-113	3-3-4	955	150	288 / 983	434 / 1481	1246	1878	\checkmark

FOCUS COLOURS 25mm Wall Mounted MD001

Contemporary painted finishes in our popular 25mm horizontal tube multirail. Prices shown are for central heating models. Optional accessories available in different finishes.

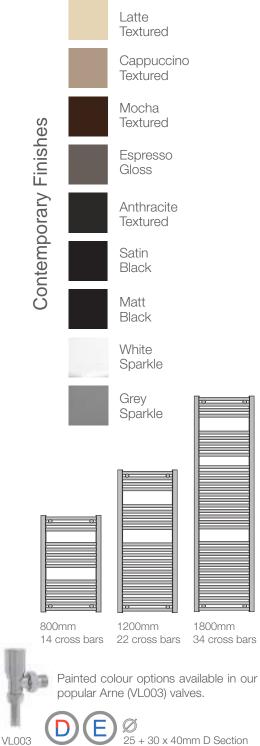

For electric element & valve options see pages 144 & 148



Satin Black Finish

Focus Colours	Din		Bar	Pipe		Output ∆ T50°C	Output	Stock or made	
MS 15 C	н	W	D	config		wattage	Watts/ BTU's		to order
MD001	800	500	93 - 113	3-5-6	455	150	420 / 1433	1817	\checkmark
MD001	1200	300	93 - 113	4-5-13	255	200	424 / 1447	1835	\checkmark
MD001	1200	500	93 - 113	4-5-13	455	300	663 / 2262	2868	\checkmark
MD001	1200	600	93 - 113	4-5-13	555	400	783 / 2672	3388	\checkmark
MD001	1800	500	93 - 113	4-5-12-13	455	600	969 / 3306	4192	\checkmark


FOCUS GREY SPARKLE 25mm Wall Mounted MD001

Stocked in a selection of our most popular sizes, our grey sparkle finish adds a dazzling hue to our staple multirail.



Contemporary Finishes





800mm 14 cross bars

1200mm 22 cross bars






Painted colour options available in our popular Arne (VL003) valves.

Ø Ľ VL003 25 + 30 x 40mm D Section

For electric element & valve options see pages 144 & 148

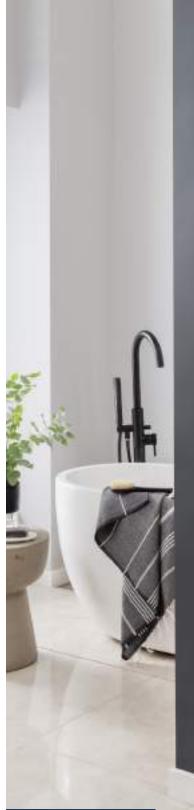



New for 2019

Focus Colours	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock or made
MS 15 C			D	config		element wattage			to order
MD001	800	500	93 - 113	3-5-6	455	150	420 / 1433	1817	\checkmark
MD001	1200	300	93 - 113	4-5-13	255	200	424 / 1447	1835	\checkmark
MD001	1200	500	93 - 113	4-5-13	455	300	663 / 2262	2868	\checkmark
MD001	1200	600	93 - 113	4-5-13	555	400	783 / 2672	3388	\checkmark
MD001	1800	500	93 - 113	4-5-12-13	455	600	969 / 3306	4192	\checkmark

FOCUS WHITE SPARKLE 25mm Wall Mounted MD001

Explore our best- selling sizes with a subtle glimmer of white sparkle...





34 cross bars

Painted colour options available in our popular Arne (VL003) valves.

Ø L VL003 25 + 30 x 40mm D Section

For electric element & valve options see pages 144 & 148

64	10


New for 2019


Focus Colours	rs Dimensions (mm)						Output	Output	Stock
MS 15 C			D	- config					or made to order
MD001	800	500	93 - 113	3-5-6	455	150	420 / 1433	1817	\checkmark
MD001	1200	300	93 - 113	4-5-13	255	200	424 / 1447	1835	\checkmark
MD001	1200	500	93 - 113	4-5-13	455	300	663 / 2262	2868	\checkmark
MD001	1200	600	93 - 113	4-5-13	555	400	783 / 2672	3388	\checkmark
MD001	1800	500	93 - 113	4-5-12-13	455	600	969 / 3306	4192	\checkmark

CHUBE Wall Mounted MD035



The round tube polished stainless steel design with rear air vent, brings together aesthetics and practicality. It will suit any modern bathroom. Please see page 150 for colour options Stainless Steel suitable for all hot water systems.





Þ				_
E	_	_	_	=
Г				
E				
F				_
F				
Þ				
E				
E	_	_	_	
				1

800mm 12 Cross Bars







18 Cross Bars

Chube	Dime	Dimensions (mm)		Bar			Output ∆⊺50°C	Output ∆T60°C	Stock
SS 30 H				- config	centres				or made to order
MD035	800	300	100	3-4-5	268	100	161 / 549	696	\checkmark
MD035	800	400	100	3-4-5	368	100	197 / 672	852	\checkmark
MD035	800	500	100	3-4-5	468	125	243 / 829	1051	\checkmark
MD035	800	600	100	3-4-5	568	150	269 / 918	1164	\checkmark
MD035	1200	300	100	3-4-5-6	268	125	240 / 819	1038	\checkmark
MD035	1200	400	100	3-4-5-6	368	150	294 / 1003	1272	\checkmark
MD035	1200	500	100	3-4-5-6	468	200	348 / 1187	1505	\checkmark
MD035	1200	600	100	3-4-5-6	568	200	402 / 1372	1740	\checkmark
MD035	1600	300	100	3-4-5-6-6	268	200	321 / 1095	1388	\checkmark
MD035	1600	400	100	3-4-5-6-6	368	200	391 / 1334	1692	\checkmark
MD035	1600	500	100	3-4-5-6-6	468	300	464 / 1583	2007	1
MD035	1600	600	100	3-4-5-6-6	568	300	536 / 1829	2319	1

Kerve is the curvaceous sibling of the Chube. As the name suggests the hanging bars have a gentle tactile bow. The design has an integral rear air vent for aesthetic appeal and ease of installation. Available in a wide range of heights and widths. Polished stainless steel manufacture, suitable for all hot water systems. Please see page 150 for colour options







800mm 12 Cross Bars

 1200mm
 1600mm

 18 Cross Bars
 24 Cross Bars






Kerve	e Dimensions (mm)		Bar	Pipe		Output ∆ T50°C	Output ∆ ⊤60°C	Stock or made	
SS 30 H		W	D	config		wattage	Watts/BTU's	BTU's	to order
MD036	800	500	120	3-4-5	468	125	243 / 829	1051	\checkmark
MD036	800	600	130	3-4-5	568	150	269 / 918	1164	\checkmark
MD036	1200	500	120	3-4-5-6	468	200	348 / 1187	1505	\checkmark
MD036	1200	600	130	3-4-5-6	568	200	402 / 1372	1740	\checkmark
MD036	1600	500	120	3-4-5-6-6	468	300	464 / 1583	2007	\checkmark
MD036	1600	600	130	3-4-5-6-6	568	300	536 / 1829	2319	\checkmark

Galaxy has clean lines and plenty of hanging space. Manufactured from polished stainless steel. Please see page 150 for colour options Suitable for all hot water systems.






1600mm 7 cross bars 1200mm 700mm 5 cross bars 3 cross bars



VL003 DE © Ø 31.8 + 22mm For electric element & valve options see pages 144 & 148

Galaxy	Dimensions (mm)			Bar	Pipe		Output ∆ T50°C	Output ∆⊺60°C	Stock
SS 30 H			D	config	Centres				or made to order
MD059	700	500	100	3	468	75	86 / 293	372	\checkmark
MD059	1200	500	100	5	468	100	217 / 740	938	\checkmark
MD059	1600	500	100	7	468	125	296 / 1010	1281	\checkmark

PEARL Wall Mounted MD058

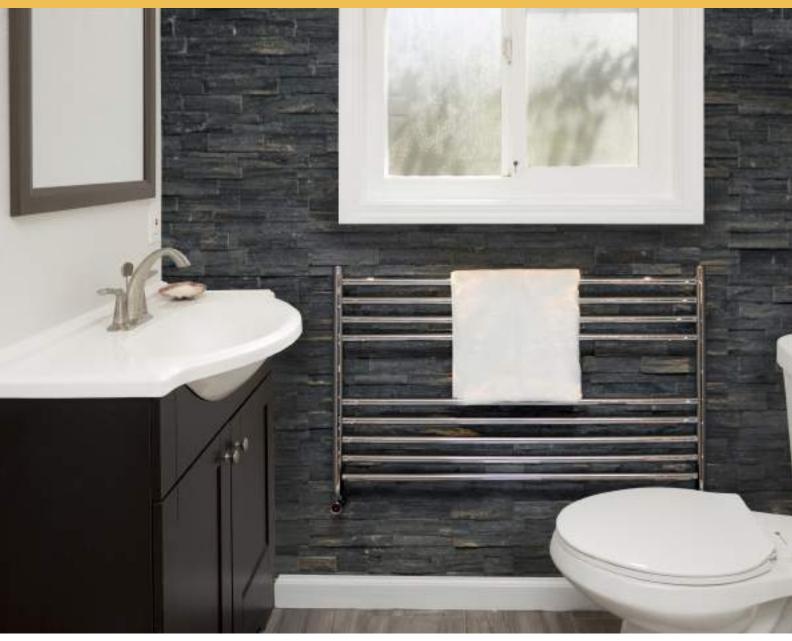

High quality polished stainless steel. Pearl's chic styling and sensible design allows you to hang towels side by side. Suitable for all hot water systems. Please see page 150 for colour options





Pearl	Dim	ensions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
SS 30 H		W		config			∆ T60°C BTU's		or made to order
MD058	600	750	100	4-5	718	419 / 1430	1813	100	\checkmark
MD058	600	1000	100	4-5	968	517 / 1764	2237	125	\checkmark
MD058	800	750	100	3-4-5	718	529 / 1805	2289	125	\checkmark
MD058	800	1000	100	3-4-5	968	682 / 2327	2951	150	\checkmark

600mm

9 cross bars

800mm

12 cross bars

TUNE Wall Mounted MD003

Contemporary style, these multirails work well with most interior design schemes. Tune has straight cross rails and the Melody has a gentle curve. Both are exceptionally practical and work well in bathrooms and kitchens alike. Prices shown are chrome finished for central heating models.

Optional Aroma Plug







13 Cross Bars

1186mm 20 Cross Bars





1508mm

1738mm 30 Cross Bars

Ø 32 + 22mm

E

D

VL003



25 Cross Bars





Melody (Curved)	Dim	ensions	6 (mm)	Bar	Pipe		Output	Output	Stock
MS 15 C			D	config			∆T50°C Watts/BTU's		or made to order
MD004	772	500	100 - 115	3-5-5	450	125	290 / 989	1254	\checkmark
MD004	772	600	100 - 115	3-5-5	550	200	347 / 1184	1501	\checkmark
MD004	1186	500	100 - 115	5-5-5-5	450	300	465 / 1587	2012	\checkmark
MD004	1186	600	100 - 115	5-5-5-5	550	300	553 / 1887	2393	\checkmark
MD004	1508	500	100 - 115	5-5-5-5-5	450	400	581 / 1982	2513	\checkmark
MD004	1508	600	100 - 115	5-5-5-5-5	550	400	686 / 2341	2968	\checkmark
MD004	1738	500	100 - 115	6-6-6-6-6	450	600	686 / 2341	2968	\checkmark
MD004	1738	600	100 - 115	6-6-6-6-6	550	600	815 / 2781	3526	

STELLA Wall Mounted MD034



Contemporary styling always makes an impact. Stella is manufactured from polished stainless steel. Please see page 150 for colour options Suitable for all hot water systems.





1200mm 22 cross bars

800mm 15 cross bars



	Stella	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
SS	30 H	Н	W	D		Centres		∆ T50°C Watts/BTU's		or made to order
	MD034	800	450	75 - 95	3-4-8	400	125	412 / 1406	1783	\checkmark
	MD034	800	600	75 - 95	3-4-8	550	200	515 / 1757	2228	\checkmark
	MD034	1200	450	75 - 95	4-8-10	400	200	608 / 2074	2630	\checkmark
	MD034	1200	600	75 - 95	4-8-10	550	300	759 / 2590	3284	\checkmark

STUDIO Wall Mounted MD006



Simple style, with bold straight cross rails. Manufactured from a high quality brass and chromed to a mirror finish.

Supplied with a hidden rear air vent for aesthetic appeal and ease of installation. Available in three different heights. If you need a different size, talk to us about our bespoke service. Prices shown are for all hot water and heating systems.


Please see pages 150 & 151 for finishes and colour options.



Rear air vent Capped off smooth ends for aesthetic appeal and ease of installation.



_		_
b		æ
		\equiv
		=
		=
F		-
		3
E		
<u> </u>		긆



1435mm 30 Cross Bars


1000mm 21 Cross Bars

720mm 14 Cross Bars

31.8 + 25.4mm



	Studio	Dim	ensions		Bar	Pipe		Output	Output	Stock
BR	30 H			D		Centres	element wattage			or made to order
	MD006	720	500	82 - 102	4-4-6	468	125	327 / 1116	1415	\checkmark
	MD006	1000	500	82 - 102	6-7-8	468	200	482 / 1645	2086	\checkmark
	MD006	1435	500	82 - 102	6-8-8-8	468	300	690 / 2354	2985	\checkmark

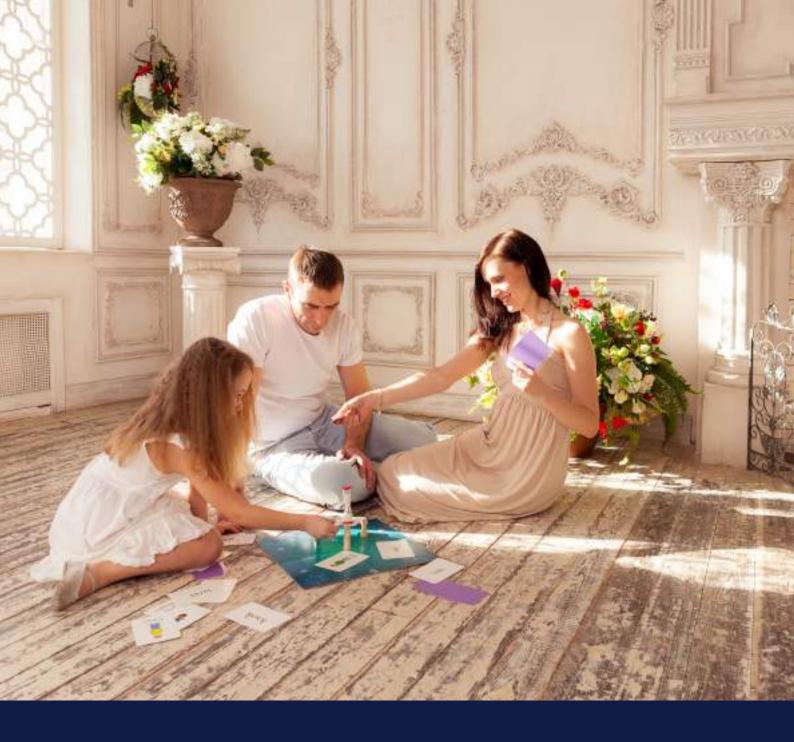

be elegant t

VOGUE Traditional Towel Rails

A collection of traditional towel rails. Designed and handcrafted by Vogue UK, reflecting our commitment to providing the finest interior pieces.

High quality materials and finishes with our guarantee to stand the test of time.



REGENCY Floor and Wall Mounted LG004 / OG006



Mild Steel Metallic Finish Supplements

Gold - POA

Bright Nickel - Chrome - POA





T

OG Ball Joint


The classic column radiator towel rail, offering high heat output. Brass or mild steel manufactured framework with an integral white mild steel column radiator. Prices shown are chrome finished for central heating models. Please see pages 150 & 151 for finishes and colour options. Please Note: The colour option does not apply to the Mild Steel (MS) model inset radiators.

	Regency	Dim	ension	S (mm)	Bar	Face to Face	Electric element	Output	Output ∆⊺60°C	Stock or made
	MS 15 C	н	W	D	config	connections	wattage	Watts/BTU's	BTU's	to order
	LG004-MS	963	538	230	1	393	200	392 / 1338	1697	\checkmark
	LG004-MS	963	673	230	1	528	300	554 / 1890	2397	\checkmark
	LG004-MS	963	763	230	1	618	400	653 / 2228	2825	\checkmark
(Regency		nsions		Bar config	Face to Face	Electric element wattage	Output ∆⊺50°C Watts/BTU's	Output ∆⊺60°C BTU's	Stock or made to order
		Н	W	D		connections	Wallage	Wallo, DTO 5	5100	to order
	LG004C-BR	938	VV 500	D 250	1	343	200	392 / 1338	1697	
					1					
	LG004C-BR	938	500	250		343	200	392 / 1338	1697	N
	LG004C-BR LG004B-BR	938 938	500 675	250 250	1	343 518	200 400	392 / 1338 554 / 1890	1697 2397	
	LG004C-BR LG004B-BR LG004A-BR	938 938 938	500 675 735	250 250 250	1	343 518 578	200 400 400	392 / 1338 554 / 1890 653 / 2228	1697 2397 2825	

REGENCY II Wall Mounted LG036 / OG009



The Regency II Wall Mounted emanates traditional style. This handmade British design will stand the test of time! A Vogue UK registered design, liked for its heat output, hanging space and unique design. Brass manufactured framework with an integral white mild steel column radiator. Your choice of Legacy or Originals ball joint. Other radiator colours can be specified on ordering. Prices shown are chrome finished for central heating models. Please see pages 150 & 151 for finishes and colour options.



Regency II	Dime	ensions	S (mm)	Bar config	Pipe Centres	Electric element	Output ∆⊺50°C	Output	Stock or made
BR 30 C	н	W	D	comig	Centres	wattage	Watts/BTU's	BTU's	to order
LG036-BR	825	500	150	2	425	200	384 / 1310	1661	1
LG036-BR	825	675	150	2	600	400	570 / 1945	2466	
LG036-BR	825	735	150	2	660	400	671 / 2289	2902	1
OG009C-BR	825	500	160	2	425	200	384 / 1310	1661	
OG009B-BR	825	675	160	2	600	400	570 / 1945	2466	1
OG009A-BR	825	735	160	2	660	400	671 / 2289	2902	


81

ARCADIA Floor Mounted LG017 / OG017




Arcadia the classic war horse!

A very British design which has stood the test of time. In brass or mild steel manufactured models, with plenty of towel hanging space. Chromed to a mirror finish, other finishes can be specified on ordering. Other finishes are available, please see page 151.

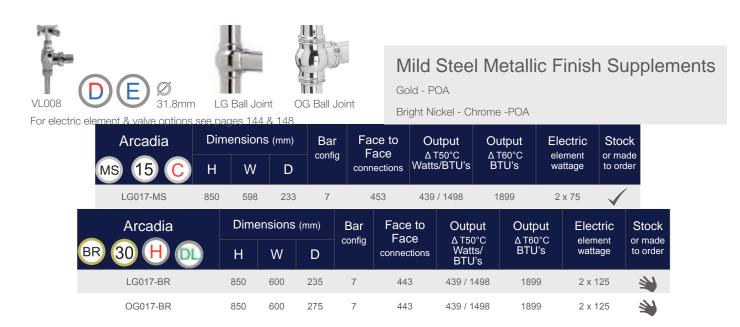

BAROQUE Floor Mounted LG014 / OG016

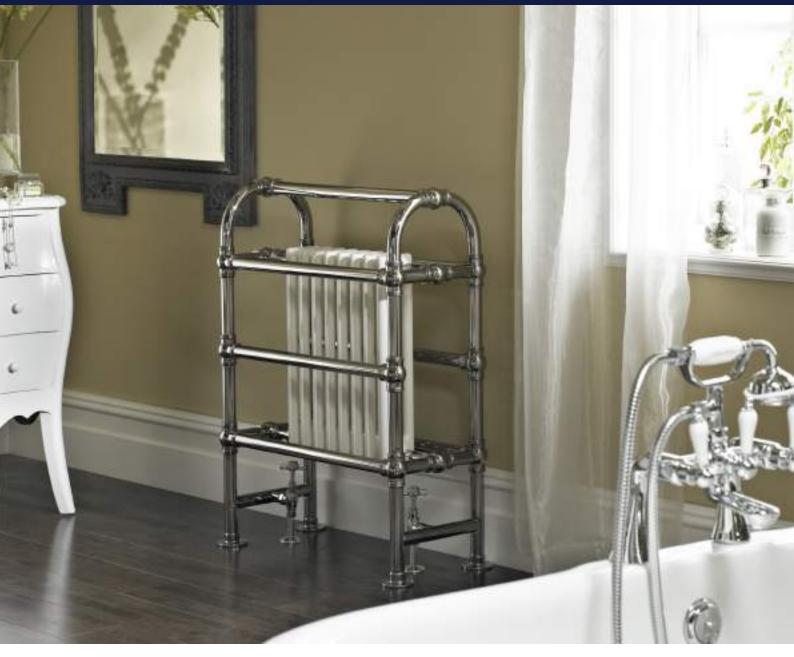

A fixture of yesteryear.

The Baroque uses a classical white mild steel column radiator within a handcrafted, chrome plated, brass framework. Superior heat output and towel hanging space are abundant in this imposing feature design. Many designers place the Baroque in the centre of a bathroom, often next to a free standing cast iron bath. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for central heating models.







For electric element & valve options see pages 144 & 148 LG Ball Joint

Baroque) (Dime	nsions	(mm)	Bar config	Face to Face	Output ∆⊺50°C	Output ∆ T60°C	Electric	Stock or made
BR 30 (C I	н	W	D	coning	connections	Watts/BTU's	BTU's	wattage	to order
LG014-BR	9	00	675	325	7	518	871 / 2972	3768	200 + 300	1
OG016-BR	9	00	675	350	7	518	871 / 2972	3768	200 +300	

REGENCY Wall Mounted LG005 / OG015



Mild Steel Metallic Finish Supplements Gold - POA

Bright Nickel - Chrome - POA







OG Ball Joint

A classic design with a compact height in three different widths. This towel rail looks great situated above the bath, just at the right height for reaching for your luxuriously warm towel! Brass or Mild Steel manufactured framework with an integral white mild steel column radiator. Other colours can be specified. Please see pages 150 & 151 for finishes and colour options. Please Note: The colour option does not apply to the Mild Steel (MS) model inset radiators. Prices shown are chrome finished for central heating models.

Regency	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	н	W	D	config	Centres	element wattage	∆T50°C Watts/BTU's	∆ T60°C BTU's	or made to order
LG005-MS	740	675	250	1	600	300	568 / 1938	2457	\checkmark
Regency	Dime	ensions	5 (mm)	Bar config	Pipe Centres	Electric element	Output ∆T50°C	Output ∆ T60°C	Stock or made
BR 30 C	Н	W	D	coning	Centres	wattage	Watts/BTU's	BTU's	to order
LG005C-BR	740	500	250	1	425	200	384 / 1310	1661	1
LG005B-BR	740	675	250	1	600	400	541 / 1846	2341	
LG005A-BR	740	735	250	1	660	400	643 / 2194	2782	1
OG015-BR	740	500	250	1	425	200	384 / 1310	1661	
OG015-BR	740	675	250	1	600	400	541 / 1846	2341	1
OG015-BR	740	735	250	1	660	400	643 / 2194	2782	

REGENCY TALL Floor and Wall Mounted LG013 / OG007

Ideal for family bathrooms or a special en-suite. Brass or Mild steel manufactured framework with an integral white mild steel column radiator. Brass versions come with an extra towel bar above the column radiator and are available in optional metallic and colour finishes. Please see pages 150 & 151 for finishes and colour options. Please Note: The colour option does not apply to the Mild Steel (MS) model inset radiators. Prices shown are chrome finished for central heating models.

Mild Steel Metallic Finish Supplements Gold - POA

Bright Nickel - Chrome - POA

Element position advised at point of ordering.



LG013FW-MS





Regency Tall WM	Dime	ensions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	Centres	element wattage	∆T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
LG013WM-MS	1403	575	250	2	500	400	824 / 2811	3564	\checkmark
Regency Tall	Dime	ensions	(mm)	Bar	Face to	Electric	Output	Output	Stock
MS 15 C	Н	W	D	config	Face connections	element wattage	∆T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
LG013FW-MS	1500	500	250	2	355	400	815 / 2781	3526	\checkmark
Regency Tall	Dime	ensions	(mm)	Bar	Face to Face	Electric	Output ∆ T50°C	Output	Stock or made
BR 30 C	Н	W	D	config	connections	wattage	Watts/BTU's	BTU's	to order
LG013FW-BR	1500	500	250	3	343	400	738 / 2518	3193	1
OG007FW-BR	1500	500	250	3	343	400	738 / 2518	3193	

BALLERINA Floor and Wall Mounted LG024A-MS / LG021-MS



This Ballerina wall and floor mounted towel rail is offered in a Legacy ball joint mild steel version as detailed on this page. Prices shown are chrome finished central heating models. The high quality brass versions (opposite) are available with Legacy or Originals Balljoint. The LG021-MS comes with added balljoints on the inlet connections to compliment the style further.





LG Ball Joint

Mild Steel Metallic Finish Supplements

Gold - POA

Bright Nickel - Chrome - POA

Ballerina	Dime	ension	S (mm)	Bar config	Face to Face	Electric element	Output ∆⊤50°C	Output ∆⊤60°C	Stock
MS 15 C	Н	W	D	comg	connections	wattage	Watts/BTU's	BTU's	to order
LG024A-MS	848	598	138	4	454	100	163 / 556	705	\checkmark
LG021-MS	1549	598	138	5	454	150	310 / 1058	1342	\checkmark

BALLERINA Floor and Wall Mounted LG021 / LG024 / OG003



High quality brass, supremely durable for longevity. The Ballerina wall and floor is available with your choice of Legacy or Originals ball joint. Prices shown are chrome finished for all heating and hot water systems. Other finishes are available, please see page 151.





Ballerina		Dimensions (mm)		Bar config	Face to Face	Electric element	Output ∆⊤50°C	Output	Stock	
В	BR 30 H	Н	W	D	coning	connections	wattage	Watts/BTU's	BTU's	to order
	LG024C-BR	938	575	138	3	418	100	163 / 556	705	1
	LG024A-BR	938	675	138	3	518	125	195 / 665	843	N
	LG024B-BR	938	825	138	3	668	150	207 / 706	895	N
	LG021A-BR	1238	525	138	4	368	125	239 / 815	1033	2
	LG021E-BR	1238	675	138	4	518	150	266 / 908	1151	N
	LG021D-BR	1538	525	138	5	368	150	292 / 996	1263	
	LG021H-BR	1538	675	138	5	518	150	327 / 1116	1415	1
	OG003A-BR	938	575	138	3	418	100	163 / 556	705	1
	OG003B-BR	938	675	138	3	518	125	195 / 665	843	
	OG003C-BR	938	825	138	3	668	150	207 / 706	895	1
	OG003D-BR	1238	525	138	4	368	125	239 / 815	1033	
	OG003E-BR	1238	675	138	4	518	150	266 / 908	1151	
	OG003F-BR	1538	525	138	5	368	125	292 / 996	1263	
	OG003G-BR	1538	675	138	5	518	150	327 / 1116	1415	

BALLERINA Wall Mounted LG010A-MS



The Ballerina wall mounted towel rail is offered in a Legacy ball joint mild steel version, as detailed on this page. Prices shown are chrome finished central heating models.

The high quality brass versions (opposite) are available with Legacy or Originals Balljoint.

Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA



Ballerina	Dime	ensions	6 (mm)	Bar	Pipe	Electric	Output	Output	Stock
MS 15 C	н	W	D	config	Centres	element wattage	∆ T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
LG010A-MS	748	498	124	4	424	100	169 / 577	732	

BALLERINA Wall Mounted LG025 / LG010 / LG021 / OG002



High quality brass, durable for longevity, the Ballerina is available with your choice of Legacy (as pictured) or Originals ball joint. Prices shown are chrome finished for all heating and hot water systems. Other finishes are available, please see page 151.







For electric element & valve options see pages 144 & 148 LG Ball Joint OG Ball Joint

Ballerina	Dime	ensions	6 (mm)	Bar	Pipe	Electric	Output	Output	Stock
BR 30 H	Н	W	D	config	Centres	element wattage	∆⊺50°C Watts/BTU's	∆ T60°C BTU's	or made to order
LG025A-BR	675	675	125	3	600	100	167 / 570	723	2
LG025B-BR	675	825	125	3	750	125	190 / 648	822	
LG010A-BR	750	500	125	4	425	100	169 / 577	732	2
LG021B-BR	1275	525	125	4	450	125	239 / 815	1033	2
LG021F-BR	1275	675	125	4	600	150	266 / 908	1151	2
LG021C-BR	1575	525	125	5	450	125	292 / 996	1263	2
LG021G-BR	1575	675	125	5	600	150	327 / 1116	1415	2
OG002B-BR	675	675	135	3	600	100	167 / 570	723	2
OG002C-BR	675	825	135	3	750	125	190 / 648	822	
OG002D-BR	750	525	135	4	450	100	169 / 577	732	2
OG002A-BR	1275	525	135	4	450	125	239 / 815	1033	
OG002E-BR	1275	675	135	4	600	150	266 / 908	1151	2
OG002F-BR	1575	525	135	5	450	125	292 / 996	1263	2
OG002G-BR	1575	675	135	5	600	150	327 / 1116	1415	*

GRANDEUR Floor and Wall Mounted LG032FW



Reflecting the quality and craftsmanship of a bygone age. Manufactured from our most robust 38mm diameter brass tube, this towel rail is of a timeless nature and would sit well in any traditional setting. Available in two heights to suit your requirements.

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.





38.1mm Grandeur Ball Joint

Grandeur	Dimensions (mm)				Face to Face		Output	Output ∆ T60°C	Stock
BR 30 H	Н	W	D	config	connections	element wattage	∆ T50°C Watts/BTU's	BTU's	or made to order
LG032FW	943	686	163	3	522	125	243 / 829	1051	*
LG032FW	1243	686	163	4	522	200	319 / 1088	1380	

GRANDEUR Wall Mounted LG032WM



The wall mounted Grandeur is available in two different heights and widths, providing ample warm towel hanging space. With classic looks and robust traditional quality, this towel rail is made to outlive fashion!

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.



Grandeur	Dimensions (mm)			Bar config	Pipe Centres	Electric element	Output A T50°C	Output ∆ T60°C	Stock
BR 30 H	Н	W	D	comg	Centres	wattage	Watts/BTU's	BTU's	to order
LG032WM	686	686	154	3	600	100	220 / 751	952	1
LG032WM	1286	636	154	4	550	150	321 / 1095	1388	

BUTLER Floor and Wall Mounted LG035 / OG004









This traditional design is tactile and sturdy, a centrepiece for a classically designed bathroom. Brass manufactured, shown with the Originals ball joint. Chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.

For electric element & valve options see pages 144 & 148 LG Ball Joint

Butler Dimensions (mm) Face to Bar Output Output Electric Stock Face ∆ T50°C Watts/BTU's ∆T60°C BTU's element wattage or made to order config BR 30 Н W D connections LG035 940 75 488 268 156 / 532 675 100 2 4 OG004 965 75 488 268 156 / 532 675 100 <u>s</u> 4

Small is always beautiful. The Hamlet is perfect for en suites and downstairs WCs where space is at a premium, but warm dry towels are still welcomed...

Brass manufactured with a chrome finish as standard with the Originals ball joint. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.







LG Ball Joint

OG Ball Joint



Hamlet	Dimensions (mm)		Bar	Pipe	Electric	Output	Output ∆ T60°C	Stock	
BR 30 H	н	W	D	config	Centres	element wattage	∆ T50°C Watts/BTU's	BTU's	or made to order
LG037	235	575	125	2	500	50	79 / 270	342	1
OG001	235	575	135	2	500	50	79 / 270	342	

ELIZABETH Floor and Wall Mounted LG003 / OG019



With sculptured lines and quality ball joints the Elizabeth has a twist on tradition. Brass or Mild Steel manufactured models Chrome finished as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.







Mild Steel Metallic Finish Supplements

Gold - POA Bright Nickel - Chrome - POA

Elizabeth	Dime	ensions	S (mm)	Bar	Face to Face	Electric element	Output ∆⊺50°C	Output ∆ T60°C	Stock
MS 15 C	Н	W	D	coning	connections	wattage	Watts/ BTU's	BTU's	to order
LG003-MS	963	673	168	8	528	125	290 / 989	1254	\checkmark
Elizabeth	Dime	nsions	6 (mm)	Bar	Face to Face connections	Electric element wattage	Output	Output	Stock
BR 30 H	H	W	D	config			∆ T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
LG003A	938	675	138	7	518	150	290 / 989	1254	
LG003B	938	825	138	7	668	150	372 / 1269	1609	
OG019A	938	675	138	7	518	150	290 / 989	1254	1
OG019B	938	825	138	7	668	150	372 / 1269	1609	

The wall mounted Elizabeth is available in two widths with your choice of Legacy (as this page) or Originals ball joints. Chrome finished as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.







LG Ball Joint

OG Ball Joint



Elizabeth	Dim	ension	S (mm)	Bar	Pipe	Electric	Output ∆ T50°C	Output	Stock
BR 30 H	н	W	D	config	Centres	wattage	Watts/BTU's	∆⊺60°C BTU's	or made to order
LG003D	740	675	125	7	600	125	290 / 989	1254	1
LG003E	740	825	125	7	750	150	372 / 1269	1609	2
OG019D	740	675	135	7	600	125	290 / 989	1254	N
OG019E	740	825	135	7	750	150	372 / 1269	1609	

ART MODERNE Floor and Wall Mounted OG011



Deco decadence in a nutshell....

High quality hexagonal brass tube manufacture, crafted to a gleaming finish. Available in two sizes and chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.




Art Moderne	oderne Dimensions (mm)			Bar config	Face to Face	Electric	Output ∆ T50°C	Output ∆ T60°C	Stock
BR 30 H	Н	W	D	coning	connections	wattage	Watts/BTU's	BTU's	to order
OG011B	943	600	175	3	268	100	197 / 672	852	
OG011A	1543	550	168	5	378	125	318 / 1085	1376	

Perfect for any bathroom with Deco sanitary and brassware, this ever popular style never fades.

The wall mounted Art Moderne is available in three different sizes to suit your room. Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.





Art Moderne	Moderne Dimensions (mm) Bar Pipe		Pipe	Electric element	Output ∆ T50°C	Output ∆⊺60°C	Stock		
BR 30 H	Н	W	D	config	Centres	wattage	Watts/BTU's	BTU's	or made to order
OG010A	836	550	145	4	450	100	211 / 720	913	1
OG010B	836	700	145	4	600	125	247 / 843	1069	
OG010C	986	700	145	4	600	125	263 / 897	1137	1

ART MODERNE II Wall Mounted OG021



Quality hexagonal brass tube meets a practical brass multirail for an elegant look. Chrome finished as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.



For electric element & valve options see pages 144 & 148

Unique Art Moderne joint with hexagonal upright and round horizontals



Art Moderne II	Dime	ension	S (mm)	Bar	Pipe	Electric	Output ∆ T50°C	Output	Stock
BR 30 H	Н	W	D	config	centres	element wattage	Watts/BTU's	BTU's	or made to order
OG021	700	532	83 - 106	7-7	500	125	354 / 1208	1532	
OG021	1000	482	83 - 106	6-6-6	450	150	429 / 1464	1856	
OG021	1200	482	83 - 106	5-5-5-5	450	200	487 / 1662	2107	

This characterful robustly British towel warmer hails quality and craftmanship.

Made for you with your choice of the Legacy or Originals ball joint (pictured).

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151.





LG Ball Joint

OG Ball Joint





Penthouse	Dime	ensions	(mm)	Bar	Pipe	Electric	Output Δ T50°C	Output	Stock
BR 30 H	н	W	D	config	centres	element wattage	Watts/BTU's	∆ T60°C BTU's	or made to order
LG018	1100	550	100	20	500	200	532 / 1815	2301	
OG020	1100	550	100	18	500	200	493 / 1682	2133	

COLONNADE 4 Wall Mounted LG023



The distinguished design features both rope and reed tubing providing a stand-out product. Manufactured from high quality brass with a chrome finish as standard. Bespoke finishes are available at an additional cost.

Finish Ideas - See Finishes page 151 for full options





Antique Gold

Melange





Bright Nickel

The Vogue Rose Gold

Featuring both rope and reed tubing





Rope

Reed



Colonnade	Colonnade 4 Dimensions (mm				Pipe	Electric	Output A T50°C	Output ∆⊺60°C	Stock
BR 30 (н	W	D	config	centres	element wattage	Watts/BTU's	BTU's	or made to order
LG023A	775	475	125	4	400	100	169 / 577	732	
LG023B	775	575	125	4	500	100	190 / 648	822	

VINTAGE Wall Mounted LG010B

This chrome finished brass tubed simple design with Legacy ball joints would sit happily in either a traditional or more contemporary setting. Bespoke finishes are available at an additional cost. Other finishes are available, please see page 151. Prices shown are for chrome finished models.





For electric element & valve options see pages 144 & 148 LG Ball Joint

Vintage	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
BR 30 H	Н	W	D	config	centres	element wattage	∆ T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
LG010B	750	475	105	4	400	100	169 / 577	732	\checkmark

NEXUS GRAND III Wall Mounted TM003



When combinations are right, something good happens!

This towel rail has a great heat output from a twin column radiator inset. It is skillfully combined in a brass framework and chrome plated. The two column radiator inset comes in white as standard, other colours can be specified at an additional cost. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for central heating models.



Nexus III	Dimensions (mm)			Bar	Pipe centres	Electric	Output ∆ T50°C	Output ∆ T60°C	Stock
BR 30 C	Н	W	D	config	Centres	wattage	Watts/BTU's	BTU's	or made to order
TM003	900	525	142 - 160	6	500	400	726 / 2477	3141	1

This single curved bar version is a more modern take on the traditional. With the same great heat output and high quality manufacture.

The mild steel two column radiator inset comes in white as standard, other colours can be specified at an additional cost. Quality brass manufactured framework. Please see pages 150 & 151 for finishes and colour options.

Prices shown are chrome finished for central heating models.





Nexus IV	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
BR 30 C	Н	W	D	config	centres	element wattage	∆⊺50°C Watts/BTU's	∆ T60°C BTU's	or made to order
TM004	900	590	214 - 232	3	500	400	699 / 2385	3024	1

SEQUEL V Wall Mounted TM006



The Sequel V has Legacy ball joints and emits a fine traditional sense of style. With brass manufactured framework and a white three column mild steel integral radiator it produces a high heat output. Other radiator colours can be specified.

Prices shown are chrome finished for central heating models. Please see pages 150 & 151 for finishes and colour options.





For electric element & valve options see pages 144 & 148 LG Ball Joint

Sequel V	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
BR 30 C	Н	W	D	config	centres	element wattage	∆ T50°C Watts/BTU's	∆ T60°C BTU's	or made to order
TM006	1000	525	191-209	4	475	400	716 / 2443	3098	



The Sequel III is manufactured from high quality brass and chrome plated. Curved hanging bars give a modern edge to this traditional style. The three column mild steel radiator inset comes in white as standard, other colours can be specified at an additional cost. Please see pages 150 & 151 for finishes and colour options. Prices shown are chrome finished for central heating models.



Sequel III	Dimensions (mm)			Bar	Pipe	Electric	Output	Output	Stock
BR 30 C	Н	W	D	config	centres	element wattage	∆ T50°C Watts/BTU's	∆⊺60°C BTU's	or made to order
TM005	1000	550	182-200	8	475	400	741 / 2528	3206	-

BASIN STANDS Floor and Wall Mounted





Kensington BSS004 As pictured with nickel finish (left)



Mayfair BSS003 To suit rounded basins



Chelsea BSS006 Pictured heated and wall mounted



City BSS007 Wall mounted with Art Linea joints


Heated or Unheated Basin Stands

Vogue have developed a range of handcrafted brass basin stands produced to order. The styles illustrated can be altered to suit your exact requirements with your choice of metal finish. Other finishes are available, please see page 151.


Please contact us for further information and a specific quotation.




Richmond BSS001

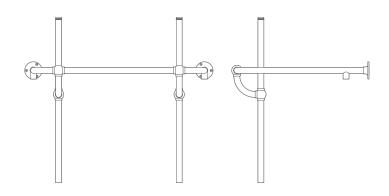

Linea Richmond BSS002

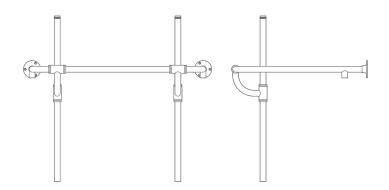

Belgravia BSS005

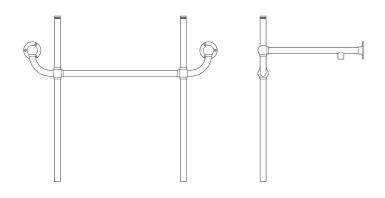



Complement Your Bathroom...


Our handmade range of shower curtain rails are beautifully engineered from high quality brass tubing for longevity. As standard they are finished in chrome. Please talk to us if you require other metal finishes or non standard sizes. Other finishes are available, please see page 151.




Single Ended Oval Wall and Ceiling Mounted $_{\text{SCR 2}}$ $_{\text{25.4mm}} \varnothing$

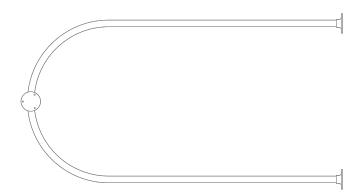






Straight Wall Mounted SCR 3 31.8mm Ø



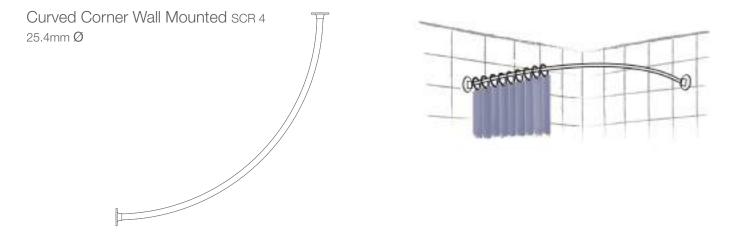

Circular Ceiling Mounted SCR 5 25.4mm Ø



Right Angle Wall Mounted SCR 6 25.4mm Ø



Shower Curtain Rail	Dim	nensions	(mm)	Description	Stock
BR 30	н	W	D	Description	or made to order
SCR 1.1	325	1275	625	Oval shape mounted to ceiling	2
SCR 1.2	325	1625	625	Oval shape mounted to ceiling	N
SCR 2.1	338	1238	675	Single ended oval shape mounted to wall and ceiling	1 No.
SCR 2.2	338	1538	675	Single ended oval shape mounted to wall and ceiling	N
SCR 3.1	75	1700	75	Straight wall mounted bar	1
SCR 3.2	75	2000	75	Straight wall mounted bar	
SCR 4.1	75	938	938	Round curve for corner applications	1
SCR 4.2	75	1238	1238	Round curve for corner applications	N
SCR 5.1	75	775dia	827	Circular wall mounted	1
SCR 5.2	75	925dia	977	Circular wall mounted	N
SCR 6.1	75	938	638	Right angled curve for corner applications	1
SCR 6.2	75	1238	638	Right angled curve for corner applications	
SCR 6.3	75	1538	638	Right angled curve for corner applications	N



unique

VOGUE Designer Radiators

Our radiators add warmth and style to any interior scheme. Radiators can be so much more than white panels on a wall.

Vogue UK designer radiators are a mix of classical and contemporary designs. They come with our pedigree and quality guarantee.



KATE Wall Mounted DR019



A contemporary radiator with cylindrical uprights available in white.

Manufactured from mild steel, suitable for closed heating systems and with a 15 year guarantee.



Optional Accessory

Towel Bar - Chrome or White AC041 (375mm wide)



For other valve options see page 148

Kate	Dime	ensions	(mm)	End to End	Output ∆T50°C	Output	Stock	
MS 15 C	Н	W	D	connections	Watts/BTU's	BTU's	to order	
DR019	1800	370	92-99	370	700 / 2388	3028	\checkmark	

SUAVE Wall Mounted MD056



The Suave has a strong, minimalist design, ideal for more contemporary properties. Manufactured in high quality mild steel and finished in anthracite or white. Please see pages 150 for colour options. Magnetic towel bar is an optional extra, please see page 147.



Anth

Anthracite Textured finish option

For electric element & valve options see pages 144 & 148 Output Suave Dimensions (mm) Pipe Electric Output Stock element wattage ∆T50°C Watts/BTU's or made to order centres ∆ T60°C BTU's MS 15 Н W D 1800 85-100 600 669 / 2283 2895 MD056 500 450

A full length mirror built into a stylish tubular radiator makes Vision an asset in every room in your home. Manufactured from high quality mild steel and available in a Chrome, White or Anthracite finish to blend with any décor.





Vision		ensions		End to End	Out ∆⊤50°C W	:put ˈatts/BTU's	Out∣ ∆⊺60°C		
MS 15 C	Н	W	D	connections	Chrome	A & W	Chrome	A & W	to order
DR022	1800	600	104	600	473 / 1614	713 / 2433	2047	3085	\checkmark

ORDINATE Wall Mounted MD005

A bold and clean lined tubular radiator. The Ordinate will integrate well into any room of the house. The radiator is chrome finished and available in four heights, the picture illustrates the tallest model. There are towel rails and robe hooks available to give the Ordinate supreme function for bathrooms and kitchens.

Optional Accessories



Towel Bar - Chrome AC023A (220mm wide)

AC023B (310mm wide) AC023C (450mm wide)

Frosted Robe Hook AC031







VL003 22 + 32mm For other valve options see page 148

Ordinate	Dim	ensions	(mm)	Number of tubes	End to End connections	Output ∆ T50°C	Output ∆⊺60°C	Stock or made
MS 15 C	н	W	D	or tubes	CONNECTIONS	Watts/BTU's	BTU's	to order
MD005	1000	362	115	8	362	229 / 781	990	\checkmark
MD005	1000	452	115	10	454	287 / 979	1241	\checkmark
MD005	1200	362	115	8	362	269 / 918	1164	\checkmark
MD005	1200	452	115	10	454	337 / 1150	1458	\checkmark
MD005	1600	362	115	8	362	350 / 1194	1514	\checkmark
MD005	1600	452	115	10	454	437 / 1491	1891	\checkmark
MD005	1800	362	115	8	362	390 / 1331	1688	\checkmark
MD005	1800	452	115	10	454	487 / 1662	2107	\checkmark

SQUIRE VERTICAL Wall Mounted DR005



An elegant square tube design with a contemporary feel. However it would also work well in a more traditional interior scheme.

Chromed to a mirror finish with a great heat output. The Squire is available in four different widths.



VL014 25sq + 30sq mm For other valve options see page 148

S	Squire Vertical	Dim	ensions	S (mm)	Number of tubes	End to End	Output ∆ T50°C	Output ∆ T60°C	Stock
	MS 15 C	Н	W	D	UT TUDES	CONNECTIONS	Watts/BTU's	BTU's	to order
I	DR005	1800	325	92 - 117	6	325	421 / 1436	1821	\checkmark
	DR005	1800	525	92 - 117	10	525	700 / 2388	3028	\checkmark
	DR005	1800	725	92 - 117	14	725	979 / 3340	4235	-
	DR005	1800	925	92 - 117	18	925	1257 / 4289	5438	2

Serenade is a vertical contemporary design radiator, manufactured from high quality mild steel with finish options of chrome, textured matt black & white. Please see pages 150 for colour options.



Optional Accessory

Towel Bar - White, Chrome or Black AC039A (266mm wide) AC039B (375mm wide)





Serenade	Dime	nsions	6 (mm)	Bar config	End to end		tput /atts/BTU's	Out ∆⊺60°C		Stock or made
MS 15 C	Н	W	D		connections	chrome	painted	chrome	painted	to order
DR008	1200	252	70	5	252	242 / 826	367 / 1252	1047	1588	\checkmark
DR008	1200	358	70	7	358	339 / 1157	515 / 1757	1467	2228	\checkmark
DR008	1800	252	70	5	252	351 / 1198	533 / 1819	1519	2306	\checkmark
DR008	1800	358	70	7	358	491 / 1675	746 / 2545	2124	3227	\checkmark

FLY LINE VERTICAL Wall Mounted DR003



Fly Line is a strong, minimalist design ideal for contemporary properties. These radiators come with a choice of single or double panel versions with the double panel offering an increased heat output. Fly Line Vertical and Horizontal are available in a variety of size options and come as standard in white or anthracite. Please see pages 150 for colour options, available on single panel versions only.



Double panel design Fly Line Vertical in white



Optional Accessory for single panel Vertical Fly Line

Towel Bar - Stainless Steel AC032 - 450mm wide



Fo	r other	valve	options	see	page	148	

Fly Line Vertical	Dime	Dimensions (mm)		NO of	End to End	Output ∆ T50°C	Output ∆ T60°C	Stock or made
MS 15 C	Н	W	D	Sections	Connections	Watts/BTU's	BTU's	to order
DR003 (single panel)	1800	224	71	3	224	402 / 1372	1740	\checkmark
DR003 (single panel)	1800	376	71	5	376	670 / 2286	2899	\checkmark
DR003 (single panel)	1800	528	71	7	528	938 / 3200	4058	\checkmark
DR003 (single panel)	1800	680	71	9	680	1206 / 4115	5218	\checkmark
DR003DP (double panel)	1800	224	71	3	224	627 / 2139	2712	\checkmark
DR003DP (double panel)	1800	376	71	5	376	1045 / 3566	4522	\checkmark
DR003DP (double panel)	1800	528	71	7	528	1463 / 4992	6330	\checkmark
DR003DP (double panel)	1800	680	71	9	680	1881 / 6418	8138	\checkmark

FLY LINE HORIZONTAL Wall Mounted DR004








Fly Line Horizontal in Anthracite

For other valve options see page 148

	Fly Line Horizontal	Dime	ensions	(mm)	NO of	Pipe	Output ∆⊺50°C	Output ∆ T60°C	Stock or made
N	as 15 C	Н	W	D	Sections	Centres	Watts/BTU's	BTU's	to order
	DR004 (single panel)	452	900	63	6	850	420 / 1433	1817	\checkmark
	DR004 (single panel)	452	1200	63	6	1150	552 / 1883	2388	\checkmark
	DR004 (single panel)	604	900	63	8	850	560 / 1911	2423	\checkmark
	DR004 (single panel)	604	1200	63	8	1150	736 / 2511	3184	\checkmark
	DR004DP (double panel)	452	900	112	6	850	654 / 2231	2829	\checkmark
	DR004DP (double panel)	452	1200	112	6	1150	858 / 2927	3711	\checkmark
	DR004DP (double panel)	604	900	112	8	850	872 / 2975	3772	\checkmark
	DR004DP (double panel)	604	1200	112	8	1150	1144 / 3903	4949	\checkmark

LURE SINGLE Wall Mounted DR020

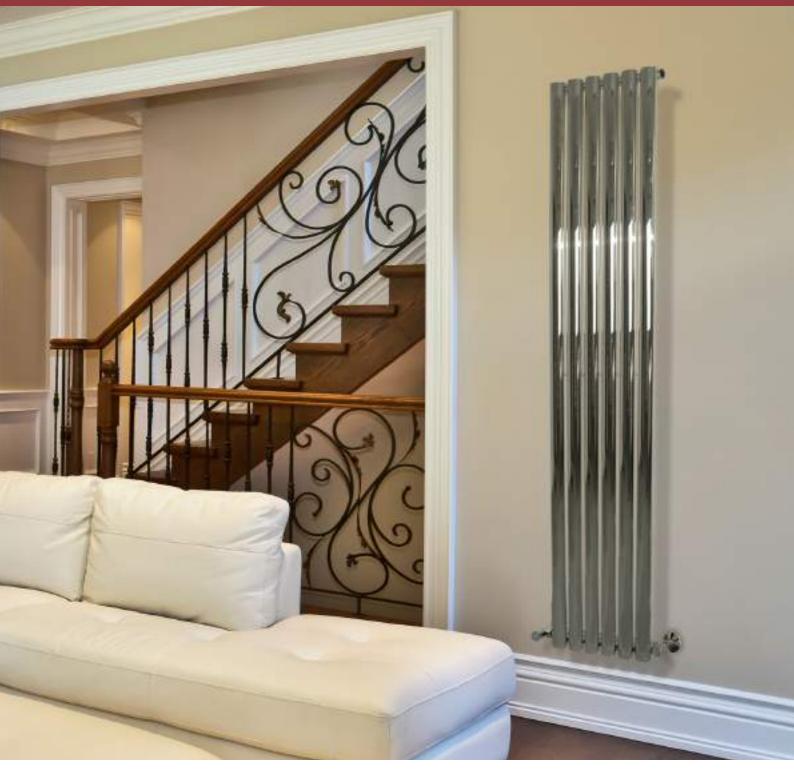

A statement piece that oozes sophistication and practical good looks, with a bank of closely fitting oval tubes to provide aesthetic appeal and efficient heat output. Available in chrome or white. Please see pages 150 for colour options.



T

Unique oval tubing

Lure Single		nsions	S (mm)	Bar config	End to end		tput ⁄atts/BTU's		tput CBTU's	Stock or
MS 15 C	Н	W	D		connections	chrome	white	chrome	white	made to order
DR020	1800	352	83	6	352	497 / 1696	751 / 2562	2151	3249	\checkmark

A modern designer radiator with twin rows of oval tubes for elegance and high output available in white or anthracite.

Manufactured from mild steel, suitable for closed heating systems and with a 15 year guarantee.





	Dim	Dimensions (mm)			End to end	Output ∆T50°C Watts/BTU's	Output ∆⊤60°C BTU's	Stock or made to order
MS 15 C	Н	W	D		connections	White or Anthracite	White or Anthracite	to order
DR020DP	1800	352	105-110	6	352	2161 / 7373	9349	

MODE II Wall or Floor Mounted CN027

CN027

CN027

CN027

CN027

CN027

1009 / 3443

1226 / 4183

922 / 3146

1538 / 5248

2153 / 7346

Contemporary styling with sleek rounded tubes. Mode II has all the attributes of a great column radiator with edgy attitude. These wall hung radiators will complement many areas of the home. Available in white RAL 9016 and Metallic Anthracite as standard. Please see page 150 for other colour options.





MODE Wall or Floor Mounted



Mode suits traditional properties, yet also looks great in contemporary settings. Available in a wide range of sizes, so you can choose a radiator which exactly suits your space and required heat output. The standard colour finish is white RAL 9016. Other RAL colours are available. Please see page 150 for other colour options.

Please note, contemporary colours available on 2 & 3 column only.

Wall brackets are included, feet and other fixing accessories are detailed on the next pages. For other valve options see page 148

Standard Stock Sizes (opposite)

We stock 2, 3 and 4 column radiators. Heights range from 300mm great for under window sills, to a 1800mm tall version. There are many sizes in between.

Non Standard Sizes (next pages)


Non standard sizes include 5 and 6 columns ranging from 300mm - 2000mm high and detailed on the next pages. Non stocked and colour finish options have an eight week lead time.




VL004 Arne Thermostatic option





For other valve options see page 148






_







6 Columns

Mode	_ Dir	nensions ((mm)	Number		Output	Stook
		excluding fee	et	Of Sections	Output ∆⊤50°C	Output ∆⊤60°C	Stock or made
MS 15 C	Н	W	D		Watts/BTU's	BTU's	to order
		2 (Column Ra	adiators			
2C-050-10	500	460	68	10	371 / 1266	1605	\checkmark
2C-050-18	500	812	68	18	688 / 2347	2976	\checkmark
2C-050-22	500	988	68	22	817 / 2788	3535	\checkmark
2C-060-10	600	460	68	10	440 / 1501	1903	\checkmark
2C-060-14	600	636	68	14	616 / 2102	2665	\checkmark
2C-060-18	600	812	68	18	792 / 2702	3426	\checkmark
2C-060-22	600	988	68	22	968 / 3303	4188	\checkmark
2C-060-24	600	1076	68	24	1056 / 3603	4569	\checkmark
2C-060-28	600	1252	68	28	1232 / 4204	5331	\checkmark
2C-180-6	1800	284	68	6	774 / 2641	3349	\checkmark
2C-180-8	1800	372	68	8	1032 / 3521	4465	\checkmark
2C-180-10	1800	460	68	10	1290 / 4401	5580	\checkmark
2C-180-12	1800	548	68	12	1548 / 5282	6698	\checkmark
3 Column Radiato	rs						
3C-050-14	500	636	100	14	720 / 2457	3115	
3C-050-18	500	818	100	18	926 / 3160	4007	
3C-050-22	500	988	100	22	1131 / 3859	4893	
3C-050-24	500	1076	100	24	1234 / 4210	5338	•
3C-050-28	500	1252	100	28	1440 / 4913	6230	
3C-060-10	600	460	100	10	609 / 2078	2635	
3C-060-14	600	636	100	14	852 / 2907	3686	
3C-060-18	600	812	100	18	1097 / 3743	4746	
3C-060-20	600	900	100	20	1218 / 4156	5270	
3C-060-24	600	1076	100	24	1462 / 4988	6325	
3C-060-30	600	1340	100	30	1827 / 6234	7905	
3C-075-10	750	460	100	10	750 / 2559	3245	
3C-075-14	750	636	100	14	1050 / 3583	4543	
3C-075-18	750	818	100	18	1350 / 4606	5840	
3C-075-22	750	988	100	22	1650 / 5630	7139	
3C-075-26	750	1164	100	26	1950 / 6653	8436	
3C-180-8	1800	372	100	8	1412 / 4818	6109	
3C-180-10	1800	460	100	10	1764 / 6019	7632	
3C-180-12	1800	548	100	12	2117 / 7223	9159	
1 Column Radiato	rs						
4C-030-20	300	900	140	20	850 / 2900	3677	\checkmark
4C-030-30	300	1340	140	30	1275 / 4350	5516	\checkmark
4C-060-14	600	636	140	14	1147 / 3914	4963	\checkmark
4C-060-18	600	818	140	18	1475 / 5033	6382	\checkmark
4C-060-20	600	900	140	20	1638 / 5589	7087	\checkmark
4C-060-24	600	1076	140	24	1966 / 6708	8506	\checkmark
4C-075-14	750	636	140	14	1417 / 4835	6131	\checkmark
4C-075-18	750	818	140	18	1822 / 6217	7883	\checkmark
4C-075-22	750	988	140	22	2227 / 7599	9636	\checkmark
4C-075-26	750	1164	140	26	2632 / 8980	11387	\checkmark

215m**m**

MODE Bespoke



This service gives the opportunity to order non standard sizes. Choose from wall or floor standing. These radiators are supplied in white RAL 9016. Coloured finishes are available, please see the colour chart on page 150. Please note, contemporary colours available on 2 & 3 column only. The lead time for delivery is approximately eight weeks. The sections cannot be joined on site. We only supply complete radiators, practical considerations need to be given to weight, carriage, handling and accessibility. Where necessary large radiators can be supplied in module format. Contact our sales office for further information.



high x 600mm wide.

Accessories for Mode Column Radiators

Stock or made to order Calculations for Sizing a Radiator...

Required output is 1200 watts Space available is1000 mm high x 750 mm wide. Approx radiator dimensions 900mm

(Taking into account space for valves)



Column Radiator Feet AC028

Adjustable Feet AC024 Height from 90mm to 120mm. Must only be used with top retaining stay.



Base Plate Cover AC025 For use with adjustable feet (above).



Top Retaining Stay AC026 For use with adjustable feet.



Heavy Duty Wall Brackets Available for 2 to 6 column radiators.

Standing Brackets For use with glass walls etc...

Welded Feet (Increase height by 100mm) Up to 20 sections requires two feet 21 to 40 sections three feet 41 to 58 sections four feet



Number of sections possible Width (600mm) divide by 45mm per section + allowance for each side. 600 - 24 divided by 45 = 12 sections.

Heat output per section

Divide your required output by sections. 1200 watts divided by 12 = 100 watts per section.

Selecting your radiator section

4-750 @102 watts per section. Therefore 12 sections @102 per section = 1224 watts @ 50 degrees C delta T.

Price calculation

 $12 \times \pounds0.00 = \pounds480.00 \text{ ex VAT}$ Plus feet if floor standing and any other non standard support brackets you may require.

Dimensions

The nominal overall length of a radiator =number of section x 45mm = 24mm for reducing bushes (12mm each end). Subject to manufacturing tolerance of +/- 0.6mm per section.

Mode Sections	Dimensio		Output	Output	Stock
MS 15 C	excludir H	ng feet D	∆T50°C Watts/BTU's	∆ T60°C BTƯ's	or made to order
	2 Column Se				
2-300	300	68	24 / 82	104	2
2-400	400	68	31 / 106	134	-
2-500	500	68	37 / 126	160	2
2-600	600	68	44 / 150	190	2
2-750	750	68	55 / 188	238	2
2-900	900	68	65 / 222	282	2
2-1000	1000	68	72 / 246	312	2
2-1200	1200	68	86 / 293	372	**
2-1500	1500	68	108 / 369	468	2
2-1800	1800	68	129 / 440	558	2) 2)
2-2000	2000	68	144 / 491	623	30
		mn Section	00/110	1.10	21
3-300	300	100	33 / 113	143	2) 2)
3-400 3-500	400	100 100	42 / 143 52 / 177	181 224	200 - 200 -
3-500 3-600	500 600	100	61 / 208	224	
3-750	750	100	75 / 256	325	
3-900	900	100	90 / 307	389	**
3-1000	1000	100	99 / 338	429	2
3-1200	1200	100	118 / 403	511	2
3-1500	1500	100	147 / 502	637	2
3-1800	1800	100	177 / 604	766	2
3-2000	2000	100	197 / 672	852	2
	4 Colu	mn Section			
4-300	300	140	43 / 147	186	2
4-400	400	140	56 / 191	242	2
4-500	500	140	69 / 235	298	2
4-600	600	140	82 / 280	355	2
4-750	750	140	102 / 348	441	2
4-900	900	140	121 / 413	524	**
4-1000	1000	140	134 / 457	579	2
4-1200	1200	140	159 / 543	689	W
4-1500	1500	140	197 / 672	852	N
4-1800	1800	140 140	235 / 802	1017	2) 2)
4-2000	2000		260 / 887	1125	
5 000		mn Section	50 / 477	004	24
5-300	300	177	52 / 177	224	2 2 2
5-400 5-500	400 500	177 177	68 / 232 83 / 283	294 359	200 200
5-600	600	177	98 / 334	424	
5-750	750	177	121 / 413	524	
5-900	900	177	143 / 488	619	-
5-1000	1000	177	158 / 539	683	2
5-1200	1200	177	188 / 641	813	2
5-1500	1500	177	232 / 792	1004	2
5-1800	1800	177	277 / 945	1198	*
5-2000	2000	177	307 / 1048	1329	2
	6 Colu	mn Section			
6-300	300	215	63 / 215	273	2
6-400	400	215	82 / 280	355	2
6-500	500	215	101 / 345	437	W
6-600	600	215	120 / 409	519	<u>لا</u>
6-750	750	215	148 / 505	640 757	2) 2)
6-900 6-1000	900 1000	215 215	175 / 597 193 / 659	757 836	200 200
6-1200	1200	215	229 / 781	990	
6-1500	1500	215	282 / 962	1220	
6-1800	1800	215	334 / 1140	1446	**
6-2000	2000	215	369 / 1259	1596	2
			-	-	-



be different

V©GUE Electric Products

Vogue UK have a comprehensive range of electrical products including – Towel Warmers Radiators Electric Underfloor Heating Envirovent fans



ECO Wall Mounted ER001



Eco is a cost effective electric radiator which allows you to control room temperature. It also has an integral economy function and frost protection. Electrical components are covered by a two year warranty.

Eco (IP24)	Dir	Dimensions (mm)		Number of	Power	Stock
MS 15 E	Н	W	D	- Sections	wattage	or made to order
ER001	580	370	80	4	500	-
ER001	580	530	80	6	750	
ER001	580	690	80	8	1000	2
ER001	580	770	80	9	1250	
ER001	580	930	80	11	1500	1 No.

STROMBOLI Wall Mounted ER002



A sleek unit with digital programmable technology. The programmer can be safety locked to avoid accidental alterations. Stromboli has a comfort, economy and frost protection settings, great for houses unoccupied for weeks at a time. Electrical components are covered by a two year warranty.

Stromboli (IP20)	Din	nensions (i	mm)	Number of Sections	Power wattage	Stock
MS 15 E	Н	W	D	Sections	wallaye	or made to order
ER002	580	470	100	4	500	2
ER002	580	630	100	6	750	
ER002	580	790	100	8	1000	
ER002	580	870	100	9	1250	
ER002	580	1030	100	11	1500	N

MODE ELECTRIC Wall or Floor Mounted



The Mode electric radiator compliments traditional and contemporary interiors to a tee. Manufactured from mild steel, supplied as standard in a white RAL 9016 powder coated finish. Most RAL colours are available as a special order. Available in seven stock sizes, 2 - 3 weeks delivery wall mounted. 4 - 6 weeks floor mounted with welded feet. Bespoke sizes can be arranged. Electrical components are covered by a two year warranty.

Electric Controls

- White as standard.
- Matt chrome finish is available.
- Temperature control between 10°C and 65°C.
- Led power indicator with frost protection.



Mode	Dimensions (mm)		Number of sections	Power wattage	Stock or made	
MS 15 E	Н	W	D		wallaye	to order
2C-1800-12E	1802	634	63	12	1500	\checkmark
3C-0600-10E	602	544	101	10	900	\checkmark
3C-0600-14E	602	724	101	14	1200	\checkmark
3C-0600-20E	602	994	101	20	1500	\checkmark
4C-0600-18E	602	904	139	18	1500	\checkmark
4C-0300-30E	302	1444	139	30	1500	\checkmark
4C-0600-24E	602	1174	139	24	2000	\checkmark



COMBY DRYER Wall Mounted MD082



The Comby Dryer is the best of both worlds; it dries towels and clothes quickly, whilst heating the bathroom at the same time. Practical and energy saving, the Comby Dryer has three programs to set. Allowing activation of the towel rail in the morning, evening or both. By simply adjusting the air guide panel to a suitable position, hot air is also able to be directed to where it is needed most. It also features a "Boost" button on the control panel, enabling more widespread ventilation to be achieved.

Ø

23 + 31 x 40mm D Section * The first value refers to the towel warmer; the second to the blower

Comby Dryer	Dim	nensions (mm)		Bar	Pipe	*Output	Output	Stock
MS 15 E	н	W	D	config	config centres	∆T50°C Watts/BTU's	∆ T60°C BTU's	or made to order
MD082 White	1441	500	94-126	7-4-11	450	750 + 1000* / 5971	7571	\checkmark
MD082 Chrome	1441	500	94-126	7-4-11	450	500 + 1000* / 5118	6490	\checkmark

COMFORT Wall Mounted EL028



Comfort is ideal for compact situations. It is electric only and is manufactured in high quality mild steel, chromed to a mirror finish. Electrical components are covered by our two year warranty. Has a rating of IP55.

Detail shot to show angled bars

Comfort	Din	nensions (mm)	Power Stock		
MS 15 E	Н	W	D	wattage	or made to order	
EL028	719	545	103	120	\checkmark	

SIMPLICITY II Wall Mounted EL040 / EL045

Uncomplicated and chic. The linear styling of Simplicity adds a sense of sophistication to any room. Slimline and discreet it provides the comfort of warm fluffy towels or bathrobes. This is electric drylined only and is manufactured in high quality stainless steel. Electrical components are covered by our two year warranty. IP44 when installed as per installation instructions.







Delivered complete, no cover shroud necessary.



	Simplicity II	Dimensions (mm)	Description	Power W	Stock
1	ss 2 E	Н			or made to order
	EL040 Round	1100	Round tube 30mm Ø	28-30	\checkmark
	EL040 Round	1500	Round tube 30mm Ø	42-44	\checkmark
	EL040 Round	1800	Round tube 30mm Ø	52-55	\checkmark
	EL045 Cube	1100	Square tube 30 x 30mm	33-35	\checkmark
	EL045 Cube	1500	Square tube 30 x 30mm	49-52	\checkmark
	EL045 Cube	1800	Square tube 30 x 30mm	64-68	\checkmark

ENVIROVENT

SILENT Design 100

- Silent elastic blocks
- Sealed for life ball bearings
- Back draught shutter and airflow guide vanes
- High performance and quality
- Incredibly silent running
- Energy efficient
- 8 Watts / 230 Volts
- IP45 rated

FCO dMFV

- Up to 6 adjustable trickle speed settings
- Timer, humidity sensor and pull cord models
- Complies with Building Regulations. Part F for system 3 Continuous Mechanical Extract
- SAP Appendix Q eligible achieving a low specific fan power of 0.28 W/I/s
- Incredibly silent running Below 20 dB(A)
- One fan for all situations, both walls and ceilings
- Low Energy DC 1.5 Watts Low voltage version available
- 4 Interchangeable front panel trims

SILENT MV

- Sound absorbent insulation
- Incredibly silent running
- 360° rotating connection box
- Sealed for life ball bearings
- Fitted with a two speed motor
- Complies with building regulations
- High performance with flexible location
- Easy installation and maintenance
- IP44 rated

SILENT 100

- Also available in silver on silent elastic blocks
- Sealed for life ball bearings
- Back draught shutter and airflow guide vanes
- High performance and quality
- Incredibly silent running
- Significant energy savings
- 8 Watts / 230 Volts or 13 Watts / 12 Volts options
- IP45 / IP57 SELV version

Optional Kits





ENV-CEILING KIT



ENV-SOFIT KIT

A range of 100mm domestic axial extract fans for wall or ceiling installations, designed to solve ventilation problems in WC's and bathrooms. Fitted with motors mounted on silent elastic blocks, the fans deliver incredibly silent running and exceptional performance and stylish design.

The ECO dMEV has been designed and developed to offer the market a constant volume, continuously running, decentralised extract fan for the lowest power consumption, the lowest noise and lowest lifecycle costs.



The SILENT MV fan range offers one of the most versatile fan systems on the market today. Due to its flexibility it can be used in a multitude of small and medium fan installations. Especially advantageous in applications where the system may be running for long periods throughout the day, the acoustic benefits of the SILENT MV fans ensure that optimum comfort is achieved without the disturbance of noisy ventilation systems.

100mm domestic axial extract fans for wall or ceiling installations. Designed to solve ventilation problems in WC's and bathrooms. Fitted to motors mounted on silent elastic blocks, fans are incredibly silent running and exceptional performance.





ENV-3M FLEX

ENV-6M FLEX

Other fans and accessories available on request

ENV-WALL KIT



Fan	Description	Airflow rates I/s (m³/h)	Stock or to order
Silent Design 100			
SILDES100 S	White Standard Model	22 (85)	\checkmark
SILDES100 SS	Silver Standard Model	22 (85)	\checkmark
SILDES100 T	White Timer Model	22 (85)	\checkmark
SILDES100 TS	Silver Timer Model	22 (85)	\checkmark
SILDES100 HT	White Adjustable Humidity Sensor Model	22 (85)	\checkmark
SILDES100 HTS	Silver Adjustable Humidity Sensor Model	22 (85)	\checkmark
Eco dMEV			
Eco dMEV S	Standard Model	18 (65)	2
Eco dMEV T	Adjustable Run-On Timer Model	18 (65)	1
Eco dMEV HT	Adjustable Humidity Sensor and Timer Model	18 (65)	
Eco dMEV HTP	Pull Cord Adjustable Humidity Sensor and Timer Model	18 (65)	
Eco dMEV S SELV	Standard (SELV) Model	18 (65)	
Eco dMEV T SELV	Adjustable (SELV) Run-On Timer Model	18 (65)	
Eco dMEV HT SELV	Adjustable (SELV) Humidity Sensor and Timer Model	18 (65)	
Eco dMEV HTP SELV	Pull Cord Adjustable (SELV) Humidity Sensor and Timer Model	18 (65)	
Silent MV			
SILMV 160100 S	Silent 2 speed in line fan	50 (80)	\checkmark
SILMV 160100 T	Silent single speed inline fan with adjustable timer	50 (80)	\checkmark
SILMV 250100 S	Silent 2 speed in line fan	50 (80)	2
SILMV 250100 T	Silent single speed inline fan with adjustable timer	50 (80)	-
Silent 100			
Silent-100 S	Standard Model	26 (95)	\checkmark
Silent-100 T	Adjustable Timer Model	26 (95)	\checkmark
Silent-100 IT	Intelligent Timer Model	26 (95)	
Silent-100 HT	Adjustable Humidity Sensor Model	26 (95)	\checkmark
Silent-100 PIR	PIR Model	26 (95)	
Silent-100S 12V	Standard Model (SELV)	26 (95)	
Silent-100 T 12V	Adjustable Timer Model (SELV)	26 (95)	N
Silent-100 TP 12V	Adjustable Timer and Pullcord Model (SELV)	26 (95)	N
Silent-100 P 'EV' (12V 50)	Pullcord (SELV)	26 (95)	N
Silent-100 HTP 12V	Adjustable Timer, Humidity Sensor and Pullcord Model (SELV)	26 (95)	
Silent-100 SS SILVER	Silver Standard Model	26 (95)	\checkmark
Silent-100 ST SILVER	Silver Adjustable Timer Model	26 (95)	\checkmark
Optional Kits			
ENV-WALL KIT	Wall Grill and pipe		\checkmark
ENV-CEILING KIT	Ceiling Vent, 6M Flex and 2 flex ties		\checkmark
ENV-SOFIT KIT	Wall grill, 3M Flex and 2 flex ties		$\overline{\checkmark}$
ENV-3M FLEX	3 metre flex 100 dia		\checkmark
ENV-6M FLEX	6 metre flex 100 dia		\checkmark

ELECTRIC Underfloor Heating

There is nothing that quite matches the comfort of warm feet when getting out of the bath or shower, especially in the cold winter months! Imagine stepping onto warm tiles controlled to the temperature you prefer.

Electric underfloor heating works by gently warming the mass of floor which in turn warms the rest of the room. Our underfloor heating kit is quick and easy to install. Ideally timed when you are fitting a new kitchen or bathroom. Electrical components are covered by a two year warranty.

The Underfloor Heating Kit Includes

- The correct size heating mat.
- Digital touch screen timer and thermostat.
- Floor sensor and floor sensor mounting pipe.
- Multimeter to check installation at every stage.
- Comprehensive installation manual and control card.





Putting You in Control...

The digital touch screen, completely programmable timer and thermostatic controller enables you to fully regulate the temperature and control when the heating is on or off. The manual override means at the touch of a button the temperature can be higher or lower to suit as and when it is needed.

EUFH	Area Metre(s) _{Square}	Rated Power Wattage per mat	Stock or made to order
EUFH150-01.0	1.0	150	\checkmark
EUFH150-01.5	1.5	225	\checkmark
EUFH150-02.0	2.0	300	\checkmark
EUFH150-02.5	2.5	375	\checkmark
EUFH150-03.0	3.0	450	\checkmark
EUFH150-03.5	3.5	525	\checkmark
EUFH150-04.0	4.0	600	\checkmark
EUFH150-04.5	4.5	675	\checkmark
EUFH150-05.0	5.0	750	\checkmark
EUFH150-06.0	6.0	900	\checkmark
EUFH150-07.0	7.0	1050	\checkmark
EUFH150-08.0	8.0	1200	\checkmark
EUFH150-09.0	9.0	1350	\checkmark
EUFH150-10.0	10.0	1500	\checkmark
EUFH150-12.0	12.0	1800	\checkmark





be boosys

V@GUE Additions and Accessories

So you've found your perfect towel rail... Now add the perfect finishing touches. From high quality valves to the latest technology in heated electric elements....



ELECTRIC ELEMENT ONLY Prices



Standard Element

tee piece AC003

Product

EE002

EE002

EE002

EE002

EE002

EE002

FF002

EE002

IP55 Suitable for zones 1 and 2 of the bathroom.

Each standard element contains an internal preset over the temperature switch and fail safe fuse. There is no thermostatic control although a suitably rated rheostat (CD-VR) will give thermal control when fitted into the electrical supply circuit.

Available as a summer kit for dual fuel options. See page 146 for

75w

100w

125w

150w

200w

300w

400w

600w



Heat Sensor Element

IPX5 suitable for zones 1 and 2 of the bathroom. Five temperature settings ranging from 30°C to 60°C. The device displays the temperature to which it is currently set and indicates the status of the heating cycle.



Optional accessory is the Heat Sensor Element Cover Shroud -AC040, to hide the cable - See page 146

Can be used when depth from wall to centre is the maximum of 70mm.

Not suitable for use with timer AC013

Product	Watts
EE006	200w
EE006	300w
EE006	400w
EE006	600w
EE006	800w
EE006	1000w

Electronique Element

IP66 Suitable for zones 1 and 2 of the bathroom. The standard Electronique element is set to a constant surface temperature of 52°C, with no need for external controls. In the fully loaded towel warming mode it will act to reduce power and save running costs. In space heating mode it will increase the power to deliver background heat needed to the maximum of its rated capacity. A safe to touch system, with safety measures incorporated.

Available as a summer kit for dual fuel options. See page 146 for tee piece AC003

Product	Watts
EE001A	200w
EE001A	400w
EE001A	600w



Contract Fixed Heat / LST Electronique Element

IP55 Suitable for zones 1 and 2 of the bathroom. Fixed Heat is designed as an energy saving element to control temperature and consume only the correct amount of power required. It maintains your pre-set temperature whether the rail is in a cold bathroom empty or fully loaded with towels. Fixed Heat for LST (low surface temperature) of 43°C must be chosen to comply with LST legislation for use in public buildings, hospitals and care homes

Product	Watts
EE001C	200w
EE001C	400w
EE001C	600w



Remote Controlled Heat Element

IPX4 suitable for zones 1 and 2 of the bathroom. Negative Temperature Coefficient technology 7 day programmable element with remote control switches the towel rail on and off when you want, at the temperature you want. Eco, boost and safety lock features included, and manual

override allows you total flexibility when needed. Can be retro fitted to existing electric or dual fuel multirail towel rails.

*Please note, Element only suitable for vertical installation

Available as a summer kit for dual fuel options. See page 146 for tee piece AC003

Product	Watts
EE005	300w
EE005	600w
EE005	900w

HEATING OPTIONS

Standard Rail Option (H) and (C) Mulitirail Option (H) and (C)





Heating Only Options

H	

Heating and Hot Water this is suitable for all heating and hot water systems. For connection to either direct (open) or indirect (closed) central heating systems.

Suitable for indirect (closed) central heating circuits only. It cannot be installed on an open circuit due to the product containing ferrous (steel) parts.

Electric Only Options



A completely independent unit requiring only a fused spur electric connection. Thermal transfer fluid is heated by an electric element within the towel rail.

Dual Fuel Options



The towel rail has the capability to run from a central heating circuit or an electric element. Handy in the summer months when the central heating is turned off.







Mulitirail Option (E)

Standard Rail Option (D)

Mulitirail Option (D)



Internal view

Please Note:



Rear external view

Flo

Electric Dryline Option

Electric dryline technology, with the towel warmer not containing any fluids. The towel warmer is heated using a silicone heater cable, exiting the towel warmer via a 3 core cable. This can then be attached to a fuse spur. Only available on specific models, please contact our sales office on +44(0)1902 387000 for further details. POA.

When using the electric element only (ie; during summer), allowance must be made for thermal expansion within the product by having the 'return' radiator valve left partially open. The 'flow' radiator valve must be closed to prevent back flow through the system. Both valves should be opened and balanced when the central heating system is operative, (i.e. during winter).

Steel Rails - Must be installed in accordance with BS7593 where a corrosion inhibitor is used. Brass Rails - Caution where water softener is installed, as this could cause dezincification (material is attacked ie. zinc eaten away by aggressive water).

Brass towel rails are manufactured using dezincification resistant brass, however it should be understood that the term 'resistant'does not entirely preclude the possibility of dezincification occurring. If you intend to install the product on an open (DHW) circuit, make reference to your local water authority to ensure dezincification has not previously occurred. Towel rails manufactured from brass tubing should not be installed on an open circuit if a water softener is present. Water analysis to determine the likelihood of dezincification is available at cost.

Models suitable for indirect (closed) circuits only cannot be installed on an open circuit due to the item containing ferrous (steel) parts. Product compatibility is the responsibility of the installer.

FITTED ELECTRIC & DUAL FUEL Pricing

This section contains a range of elements with price supplements for electric and dual fuel models. Please add the price of your element to the model you choose and we will build it for you.



Standard Element IP55 Code EE002 A benchmark element to suit each size of product.



Electronique Element IP66 Code EE001A Maintains surface temperature of product to 52 °C.



Heat Sensor Element IPX5 Code EE006* An electronic temperature sensor control.

*Optional cover shroud available AC040, See page 146



Remote Controlled Heat Element IPX4 Code EE005 NTC – Negative Temperature Coefficient technology. Remote controlled programmable element for adjustable temperature control.

Fixed Heat / LST Electronique Element IP55 Code EE001C

Ideal for LST applications where surface temperatures need to be guaranteed.

* Dual fuel models will also be supplied with a conversion tee where applicable. This can be used with VL013 valves for a mulitrail. Alternatively to a conversion tee dual fuel valves VL015 can be used.

All the images of elements depict electric only versions. Dual fuel configurations may vary including element positioning. The appropriate standard versions will be supplied in all cases unless advised otherwise.

Electric towel rails are filled with a glycol ethylene / water mix to strict guidelines. This improves the thermal transfer rate and acts as a corrosion inhibitor.

All electric and dual fuel towel rails must be fitted by a qualified person.

The elements are fitted on the right hand side as standard. They can be left hand mounted on request, on certain rails only.

This section contains information on electrical safety.

IEE Wiring Regulations have identified the following zones and IP ratings to ensure safety.



Notes

- In zones 1 and 2 if there is a likelihood of water jets being used for cleaning purposes a minimum of IPx5 is required.
- Where ceiling heights exceed 2.25m, the zones are effectively up to 3m, beyond 3m the walls are out of scope.
- Basins are not covered, however they are usually considered zone 2.
- If the space underneath a bath cannot be accessed without tools that space is considered out of zone.
- Information contained on this page is for guidance only. Please refer to current IEE Regulations or a qualified electrician.

IP Rating Guide

The IP (ingress protection) rating given to an enclosure, states the degree of protection it offers by means of two digits. A summary of these are detailed below. For more information please see IEC 529: 1989 BSEN 65029:1992.

No protection.

hands.

e.g. fingers.

Protected against solid

objects larger than 50mm

e.g. accidental touch by

Protected against solid

Protected against solid

e.g. tools and cables.

Protected against solid

Protected against dust

Totally protected against dust.

(no harmful deposits).

objects larger than 1mm.

objects larger than 2.5mm

objects larger than 12.5mm

First Digit


Protection against solid foreign objects and access to hazardous parts.

At the lowest of seven levels is 0, this means no protection is offered. At the highest level 6, there shall be no entry of dust particles.

Second Digit

Protection against entrance of water on a progressive scale. At level 1 dripping water shall have no effect. at level 6 water from powerful jets against the enclosure shall have no effect.

The letter X can be used in place of the first digit or second digit to indicate that tests have not being carried out or are not applicable.








Protected against vertically falling drops of water e.g. condensation.

Protected against direct sprays of water up to 15° from the vertical.

Protected against direct sprays of water up to 60° from the vertical.

Protected against water splashed from all directions limited ingress permitted.







effects of temporary immersion in water between 150mm and 1m.

Protected against continuous submersion at a specified depth.

ACCESSORIES



AC001 Auto air vent.

AC002 Ball vent.

AC003

AC004

Valve sleeves.

energy radiators.

Can only be fitted in manufactured products. Must be specified at point of order.

AC007

Electric element shroud covers. Shown as standard in chrome. Other finishes are available, please contact the sales office for a quote.



*Please be aware that some cover shrouds conceal the element block and cable but NOT the service nut. If unsure, please ask your Dealer for more information prior to ordering.



AC035 Blanking Plug with Aroma Oil Dish.

AC040



Heat Sensor Element Cover Shroud Can be used when depth from wall to centre is the maximum of 70mm.

AC060

Air vent cap.

AC006 Street elbow connection tubes.



Product	Description	Stock or made to order
AC001	1/8" BSP M.I. Self sealing auto vent. All models are fitted with manual air vents. To be specified on order	\checkmark
AC002	1/2" BSP M.I. Decorative air vent and plug	\checkmark
AC003	Three point 1/2" BSP adaptor. For electric element and radiator valve link	\checkmark
AC004	19 mm Ø x 100 mm long, electroplated to match towel rail and valves	\checkmark
AC005	15 mm Ø x 150 mm long	\checkmark
AC005	22 mm Ø x 150 mm long	\checkmark
AC006	15 mm Ø x 150 mm long	\checkmark
AC007A	Legacy ball joint	\checkmark
AC007B	Contemporary	\checkmark
AC007C	Mitred	\checkmark
AC007D	Flexi (suitable for use with standard element only)	\checkmark
AC007E	Variheat (suitable for use with variheat element only)	\checkmark
AC007F	Originals ball joint	\checkmark
AC007G	Electronique (suitable for use with electronique element only)	\checkmark
AC007H	Hexagonal	\checkmark
AC035	Oil Aroma Blanking Plug	\checkmark

AC040 AC060

Air Vent Cap

Heat Sensor Element Cover Shroud







AC012 Voltage Regulator A manual controller to manage power consumption to your towel warmer.





AC013 7 Day Timer This digital controller gives you the facility to pre plan when you will need your towel rail on and off.



AC014 Pattress Plate Housing the wires from the towel rail element if no external controller is required.



AC023 Clip on chrome towel bar in three widths. AC030 Magnetic towel bar.

AC032 Stainless steel towel bar.



Towel Bar for CN027

AC034

Closed

AC037 Pack of 2 Heavy Duty Hollow Wall Fixings



AC031 Clip on frosted sphere and chrome robe hook.



AC010 Round or square metal cover plates.

AC037



AC011 Arne straight or angled fixing kit.



Crosshead angled fixing kit.

	AC011A & AC011B ARE AVAILABLE IN OUR CONTEMPORARY COLOUR FINISHES.					
Product	Description	Stock or made to order				
AC010A	Round 15 mm internal diameter hinged cover plates	\checkmark				
AC010B	Square 15 mm internal diameter cover plates	\checkmark				
AC011A & AC011B	VL003 (pair) straight or angled valves with cover plates and connection tubes	\checkmark				
AC011F	VL008 (pair) angled valves with cover plates and connection tubes	\checkmark				
AC012	Chrome 75W - 400W (1 gang)	\checkmark				
AC012	Chrome 150W - 1000W (2 gang)	\checkmark				
AC013	Digital single channel programme timer (White)					
AC014	Covers 1 gang pattress box (Chrome)	\checkmark				
AC023A	Chrome 220 mm wide, suitable for MD001, MD005 and MD034	\checkmark				
AC023B	Chrome 310 mm wide, suitable for MD001, MD005 and MD034	\checkmark				
AC023C	Chrome 405 mm wide, suitable for MD001, MD005 and MD034	\checkmark				
AC030	Chrome 443 mm wide, suitable for MD056	\checkmark				
AC031	Chrome and frosted sphere. Suitable for MD001, MD003, MD005 and MD034	\checkmark				
AC032	Stainless steel 450 mm wide, suitable for DR003 and DR021	\checkmark				
AC034A	Towel Bar for CN027 - 60mm wide x 200mm wide Chome, White or Anthracite	\checkmark				
AC034B	Towel Bar for CN027 - 60mm wide x 340mm wide Chome, White or Anthracite	\checkmark				
AC034C	Towel Bar for CN027 - 60mm wide x 480mm wide Chome, White or Anthracite	\checkmark				

Pack of 2 Heavy Duty Fixings

VALVES



Arne VL003 A modern valve that works with many designs.

Available in our contemporary colour finishes.



Arne Thermostatic VL004 Controlling the heat of your towel rail or radiator.



Xero VL012 This modern tap head style suits many bathroom taps and fittings.



Piazza VL014 to our square tube products.



Combination Kit VL013 This cubed valve gives a great finish A combination kit of VL003 straight and angles valves for dual energy option, applicable for all multirail products.



Adapta VL001 A contemporary double angled valve, almost not to be noticed.

Dual Fuel Valves VL015 For both central heating and electric dual fuel options.





*Arne VL003 valves are available in Chrome as standard or one of our Contemporary Colours as an option for the same price.

Valve 2	Description	Туре	Stock or made to order
Arne VL003	1/2" BSP X 15 mm	Straight	\checkmark
Arne VL003	1/2" BSP X 15 mm	Angled	\checkmark
Arne Thermostatic VL004	1/2" BSP X 15 mm thermostatic	Straight	\checkmark
Arne Thermostatic VL004	1/2" BSP X 15 mm thermostatic	Angled	\checkmark
Art Deco VL006	1/2" BSP X 15 mm	Angled	\checkmark
Adapta VL001	1/2" BSP X 15 mm	Angled	\checkmark
Crosshead VL008	1/2" BSP X 15 mm	Straight	\checkmark
Crosshead VL008	1/2" BSP X 15 mm	Angled	\checkmark
Excelsior VL010	1/2" BSP X 15 mm thermostatic	Angled	\checkmark
Xero VL012	1/2" BSP X 15 mm	Angled	\checkmark
Piazza VL014	1/2" BSP X 15 mm	Angled	\checkmark
Crosshead 2 VL018	1/2" BSP X 15 mm	Angled	\checkmark
Combination Kit VL013	1/2" BSP X 15 mm	Angled / Straight	\checkmark
Dual Fuel VL015	1/2" BSP X 15 mm	Angled	\checkmark
Arne Corner VL023	1/2" BSP X 15 mm	Corner	\checkmark
Arne Corner Thermostatic VL024	1/2" BSP X 15 mm thermostatic	Corner	\checkmark



Art Deco VL006 These valves work well with the hexagonal tube deco designs.



Excelsior VL010 Thermostatic, a substantial valve in a time honoured design.



Crosshead VL008 A valve that suits most traditional designs. Our benchmark.



Arne Corner VL023 A discreet contemporary valve that neatly aligns with your towel warmer.



Crosshead 2 VL018 A capstan style valve, which suits ball jointed products.



Arne Corner Thermostatic VL024 Thermostatic version of of our discreet corner valves.

Valves are supplied as standard in a chrome finish. Other finishes are available. Please Note: Designs may differ slightly when ordering in different finishes. Please contact our sales office on 01902 387000 to discuss your requirements.





COLOURS

Vogue UK Radiator Colours and finishes

The colours and finishes below are available on many of our ranges carrying the RAL colour symbol. The featured colours have a £224 supplement ex VAT on the white price. Other RAL colours are available POA.



RAL colours come in a gloss finish as standard, unless specified differently.

The RAL colours in this chart have been matched as closely as possible. The colour depends on the printing or your monitor. We suggest the official RAL colour chart gives the most accurate colour sample.

Vogue UK Contemporary Colour Range



The contemporary colour range is available as a stocked item in three models Serene, Vela and Focus. White & Grey Sparkle, Latte, Cappuccino, Mocha and Anthracite have a textured finish, with Espresso and Satin Black being gloss. These finishes are also available on other ranges.

Vogue UK Metallic Finishes



*Please note: Polished Brass, Brushed Brass and Polished Copper tube finishes, are supplied in a raw, un-lacquered finish, as standard. This un-lacquered (ie; unprotected) base material will discolour in a short period of time and will therefore require regular cleaning in order to maintain the finish. To add a lacquer to preserve the finish, add an additional 20% to the unlacquered price.

Antique Bronze, Oil Rubbed Bronze & Antique Copper - Due to the reaction between the bronze solution with the base metal there will always be a degree of natural variation in shading between different components.

Inset Radiator Range







Column

JOINTS & TUBING

Selecting your joint and tube design could not be more flexible.

Our hand made selection of towel rails can be as individual as you are.

Vogue UK Tubing Range



Vogue UK Joint Range













Ball Joint 1"

Legacy Ball Joint 1.25"

Originals Ball Joint Charlotte Ball Joint 1.5" Grandeur Joint

The 1909 Ball Joint



Cylinder Joint



Art Moderne Corner



Minama Square Corner



Romolo Joint



Art Linea Joint



Mitred Corner



Plain Corner



Contemporary Corner



Minama Round Corner



Valour Bend

General terms & conditions

Bespoke items are non-returnable. Please note that certain non-stock models are also non-returnable, please confirm with our Sales Office on telephone +44(0) 1902 387000.

All heat outputs are shown at 50°C Δ t, in compliance with BSEN442 - Specification for Radiators and Convectors. To convert to 60°C Δ t, multiply heat output by conversion factor 1.268 (approximate figure), to convert to 70°C Δ t, multiply heat output by conversion factor 1.549 (approximate figure).

All measurements given are nominal dimensions only (mm), and are not binding. Detailed technical drawings are available on request from our Sales Office on +44(0) 1902 387000 or via our website - www.vogueuk.co.uk

Manufactured from hot brass stamped fittings and high quality brass tube complying to BS2871.

Some models manufactured from high grade CR steel tubing and/or containing steel components suitable for closed/indirect circuits only. All rails are pressure tested to 100p.s.i (6.9 bar) air immersed in water. All models are fitted with $2 \times 1/2$ " BSP F.I. connections. Alternative M.I. or compression fitting is available on request. 3/4" BSP connections available at extra cost on some models.

A manual bleed air vent is fitted to all hot water/dual fuel models. Auto air vents available on request at additional cost.

Pipe centres are provided as centre to centre tappings using the Vogue (UK) range of valves.

In compliance with our policy of constant improvement we reserve the right to alter specifications, materials and dimensions or discontinue any of our products without prior notice.

The colours in the brochure are as accurate as the colour printing processes allow. Photographs for illustrative purposes only. We reserve the right to change specifications without prior notification.

Vogue (UK) Ltd recommends that existing or new pipework is not adjusted until the towel warmer or radiator is installed in its final position.

Products ordered incorrectly or where the specification has changed may incur a re-stock charge. Bespoke/custom made products are non-refundable. Upon the return of a product Vogue (UK) Ltd reserve the right to refuse credit if the product is not made available upon an agreed collection/return in line with the Company's terms and conditions.

A copy of the Company's full Terms and Conditions of Trading is available on request.

Continual Improvement

Our company policy is one of continual improvement and Vogue (UK) Ltd reserves the right to amend designs, specification or discontinue any of our products without prior notice. E & OE

Valves are NOT supplied with each product. Please see Valves & Accessories section for further details.

Tiles provided by British Ceramic Tile Ltd www.britishceramictile.com

Guarantee

Vogue (UK) Ltd is a company that celebrates the wealth of traditional, quality handcrafted heated towel rails and radiators and is one of the last true manufacturers in the UK. Vogue branded towel rails installed within the UK are also covered by an extended 2, 15 or 30 Year Guarantee – subject to Terms & Conditions of guarantee against manufactoring defects. Components such as inset radiators, not of our manufacture, which become faulty by reason of defected materials, come with a 2 year guarantee only.



EN442.1 & 2

Where applicable product within this publication has undergone independent testing to verify heat outputs are in accordance with the parameters laid down in the above European standards. Some products at the time of print may be awaiting confirmation

Construction Product Regulations (CPR)

In compliance with the above, Vogue UK LTD (The company) holds declaration of Performance Certificates (DoPs) for all products covered by the Harmonised Standard EN442.1 / 2. Copies of relevant certificates are available on request.

Product with a declared heat output of 200Watt or less 50 degree C Detla T are not classified by The company as heating appliances and are therefore not covered by the above. All individually manufactured bespoke products are similarly exempted from the above legislation

ISO 9001:2008 certified

Vogue (UK) is proud to be ISO 9001: 2008 certified. Quality is utmost in importance to our organization, in both the products and services we provide our customers. Reflecting this commitment, Vogue (UK) implemented and received certification of our Quality Management System in accordance with ISO 9001:2008.

General

Carriage - Paid UK mainland, excluding requests for next day service, Export carriage can also be arranged. Please contact our Sales Office for details on telephone +44(0) 1902 387000.

All images are for illustration purposes only.

INDEX

Model	Code	Material	Section	Style	Installaton	Page	Model
Α							Flyline
Accessories	AC		А	AC		146	Focus
Aquila	DR016	MS	CN	DTW	WM	36	Focus
Arc	MD065	MS	CN	MTW	WM	33	Focus
Arcadia	LG017/OG017	MS/BR	TR	TTW	FM	82	Focus
Art Moderne	OG011	BR	TR	TTW	FW	96	Focus
Art Moderne	OG010	BR	TR	TTW	WM	97	G
Art Moderne II	OG021	BR	TR	MR	WM	98	Galax
Axis	MD062	MS	LR	MR	WM	60	Gallar
В							Gallar
Ballerina	LG024A-MS/	MS	TR	TTW	FW	86	Grace
	LG021-MS						Granc
Ballerina	LG024/LG021/ OG003	BR	TR	TTW	FW	87	Grand
Ballerina	LG010A-MS	MS	TR	TTW	WM	88	н
Ballerina	LG025/LG010/	BR	TR	TTW	WM	89	Hamle
	LG021/OG002						Harmo
Baroque	LG014/OG016	MS/BR		TTW	FM	83	Harm
Basin Stands		BR	TR	TTW	FW/WM	106	Heatir
Bathroom Zones			A			145	I
Binary	TR002	BR/MS	CN	S	WM	49	Ideal
Boxa	CN009	MS/SS	CN	MTW	WM	32	
Butler	LG035/OG004	BR	TR	TTW	FW	92	leri
С							Inttra
Carina	MD051	MS	CN	S	WM	48	J
Chic	MD046	MS	CN	DTW	WM	20	Joints
Chorus	MD002	MS	LR	MR	WM	65	K
Chube	MD035	SS	LR	MR	WM	70	Kate
Colonnade 4	LG023	BR	TR	TTW	WM	100	Kerve
Colour options			А			150	Keys
Combes	MD063	MS	LR	MR	WM	62	L
Comby	MD052	MS	CN	MR/S	WM	50	Lure E
Comby Dryer	MD082	MS	E	MR/S	WM	133	Lure S
Comfort	EL028	MS	E	ETW	WM	134	Μ
Concertina	DR010	MS	CN	DR/	WM	8	Marine
0	MD050	140		DTW	10/2 4	00	Mantt
Curvee	MD050	MS	CN	MR	WM	38	Meloc
Cygnus	DR012	MS	CN	DR/ DTW	WM	10	Memo
Cygnus Harmonique	DR032	MS	CN	RTW	WM	11	Metall
D							Moda
Décor	MD084	MS	CN	MTW	WM	40	Mode
Décor Harmonique	MD094	MS	CN	RTW	WM	41	Mode
Draco	DR015	MS	CN	MTW	WM	12	Mode
E							Mode
ECO	ER001	MS	Е	ER	WM	130	Mode
Electric Element & Dual Fuel Fitted Pricing			А			144	N
Electric Elements - Standard	EE001/EE002/ EE003/EE005/ EE006		А	EL		142	Nexus
Electric Under Floor	EUFH		E	UFH		138	Nexus
Heating			_				Nexus
Elizabeth	LG003/OG019	MS/BR		TTW	FW	94	0
Elizabeth	LG003/OG019	BR	TR	TTW	WM	95	Ordina
Envirovent Electric Fans	SILD/ECO DMEV/ SILM/SIL	N/A	E			136	Р
F							Pearl
Flexx	CN015	BR	CN	MTW	WM	14	Penth
Flyline Horizontal	DR004/DR004DP	MS	DR	FR	WM	119	Phoer

Model	Code	Material	Section	Style	Installaton	Page
Flyline Vertical	DR003/DR003DP	MS	DR	FR	WM	118
Focus	MD001	MS	LR	MR	WM	64
Focus Colour Range	MD001	MS	LR	MR	WM	67
Focus Grey Sparkle	MD001	MS	LR	MR	WM	68
Focus Horizontal	MD001	MS	LR	MR	WM	66
FocusWhite Sparkle	MD001	MS	LR	MR	WM	69
	MDOOT	IVIO	LN	IVID	VVIVI	09
G Galaxy	MD059	SS	LR	MR	WM	72
Gallant	MD039	SS	CN	MR	WM	34
Gallant II	MD040	MS	CN	MR	WM	35
Grace	MD040	MS	CN	MTW	WM	17
Grandeur	LG032FW	BR	TR	TTW	FW	90
Grandeur	LG032WM	BR	TR	TTW	WM	91
	LGUSZVIVI	DN	In	1177	VVIVI	91
H Hamlet	LG037/OG001	BR	TR	TTW	WM	93
Harmonique	MD060 MD090	MS	CN	RTW	WM	53
Harmonique Duo	MD090	MS	CN A	RTW/S	WM	51 143
Heating Options			A			143
ldeal	MD055	SS	CN	MTW	WM	01
leri	TM014		CN	S	WM	31
		BR/MS				52
Inttra	CN013	BR/MS	CN	MTW	WM	13
J			А			152
Joints & Tubing			A			102
K	DD010	MC		DDAG	10/04	110
Kate	DR019	MS	DR	DR/VT	WM	112
Kerve	MD036	SS	LR	MR	WM	71
Keys II	CN030	MS	CN	DTW	WM	21
L.		MC		DDAG	10/04	
Lure Double	DR020DP	MS	DR	DR/VT		100
Lure Single	DR020	MS	DR	DR/VT	WM	120
M	DD000	MC			WM	0
Marine	DR009	MS	CN	DR/ DTW	VVIVI	9
Manttra V	CN075	MS	CN	MTW	WM	15
Melody	MD004	MS	LR	MR	WM	75
Memo	CN007	MS	CN	MTW	WM	25
Metallic Finishes			А			151
Moda	CN001	MS	CN	RTW	WM	23
Mode Accessories	AC					126
Mode Bespoke	2C/3C/4C/5C/6C	MS	DR	CR	WM	127
Mode Column Radiator	2C/3C/4C	MS	DR	CR	WM	124
Mode Electric	2C/3C/4C	MS	Е	CR	WM	132
Mode II	CN027	MS	DR	CR	WM	122
Ν						
Nexus Grand III	TM003	BR	TR	RTW	WM	102
Nexus Grand IV	TM004	BR	TR	RTW	WM	103
Nexus III	TM001	BR	CN	RTW	WM	54
Nexus IV	TM002	BR	CN	RTW	WM	55
0						
Ordinate	MD005	MS	DR	VT	WM	115
Р						
Pearl	MD058	SS	LR	MR	WM	73
Penthouse	LG018/OG020	BR	TR	MR	WM	99
Phoenix	DR017	MS	CN	DTW	WM	37

Model	Code	Material	Section	Style	Installaton	Page
Pure	MD037	BR	CN	MTW	WM	16
Q						
Quadrate	MD074	MS	CN	MTW	WM	26
Quadrate Harmonique	MD078	MS	CN	RTW	WM	27
R						
Regency	LG004/OG006	MS/BR	TR	TTW	FW	80
Regency	LG005/OG015	MS/BR	TR	TTW	WM	84
Regency II	LG036/OG009	MS/BR	TR	TTW	WM	81
Regency Tall	LG013/OG007	MS/BR	TR	TTW	FW/WM	85
Rubik	MD038	SS	CN	MTW	WM	28
S						
Sequel III	TM005	BR	TR	RTW	WM	105
Sequel V	TM006	BR	TR	RTW	WM	104
Serenade	DR008	MS	DR	FR	WM	117
Serene	MD049	MS	CN	MR	WM	30
Sesto Rondo III	MD021	BR	CN	MR	WM	56
Shower Curtain Rails	SCR1 - 6	BR	TR		WM	108
Simplicity II	EL040/EL045	SS	Е	VT	WM	135
Simplicity IV	IVCN026	BR	CN	TTW	WM	47
Smooth	CN035	MS	CN	MTW	WM	18
Smooth II	CN036	MS	CN	MTW	WM	19
Solo	TR001	BR/MS	CN	S	WM	49
Squire	MD047	MS	CN	MR	WM	29
Squire Vertical	DR005	MS	DR	DR	WM	116
Stella	MD034	SS	LR	MR	WM	76
Stromboli	ER002	MS	E	ER	WM	131
Studio	MD006	BR	LR	MR	WM	77
Suave	MD056	MS	DR	FR	WM	113
т						
Tempo	MD072	MS	CN	MR	WM	57
Tune	MD003	MS	LR	MR	WM	74
U						
Unique	CN028	MS	CN	MTW	WM	42
v						
Valves	VL		А	VL		148
Vela	MD048	MS	CN	MR	WM	39
Venture	CN022	BR	CN	TTW	WM	43
Vintage	LG010B	BR	TR	TTW	WM	101
Vision	DR022	MS	DR	DR/VT	WM	114
Vista	IN002	SS	CN	MTW	WM	24
Vivid	CN021	BR	CN	TTW	WM	44
Vivid IV	IVCN021	BR	CN	TTW	WM	45
Vivid IV Horizontal	IVCN021	BR	CN	TTW	WM	46
z						
Zenith	IN007	SS	CN	MTW	WM	22

Innovation

Vogue UK is a vibrant organisation with research being conducted in many technology disciplines. This research results in exciting products as evidenced throughout the design collections we offer. Vogue UK has set itself a clear objective: both through consistent preservation and long tradition of British craftsmanship and meeting its high standards, as well as creating, with its very own innovative heating developments, contemporary design and a heightened passion for detail and perfection.

Those who appreciate lasting value derived from the synergy of traditional craftsmanship, creative development and the latest technology, as well as dedication in seeking the extraordinary know not to entrust any towel rail design but rather to a design crafted from Vogue (UK).

Vogue UK emphasises its creative drive to differentiate its towel rail designs down to the finest detail and its desire to monitor, to the greatest possible extent, the development and manufacture of a hand crafted product. We use the latest technology to produce low-volume individual parts with high added value continuously offering home interiors and connoisseurs of design new, impressive towel rail models.

Environment

Vogue UK has a legacy of core values, rooted strongly in safety, health and environmental stewardship. For 28 years, we have been reducing the environmental footprint of our own operations. Today, footprint reduction is expected of all companies. The challenge - and the opportunity - are products and manufacturing processes that are safer, less toxic, more energy efficient, use less water, less energy, and produce fewer greenhouse gases. Running our company in an environmentally friendly way is good for the environment and good for our business. We're working to conserve energy and reduce waste and are exploring the use of sustainable materials and products. Whether we're saving costs by reducing energy consumption or creating covetable products through innovative, sustainable design, we believe that reducing our impact on the environment can also result in positive business benefits.

\geq	Material Section		Style		Installation
\mathbf{r}	BR Brass	CN Contemporary	C Column radiator	MTW Modern towel warmer	FM Floor Mounted
	MS Mild Steel	LR Ladder Rails	DR Designer radiator	RTW Radiator towel warmer	WM Wall Mounted
X	SS Stainless Steel	TR Traditional	DTW Designer towel warmer	S Shelf	FW Floor and Wall Mounted
Щ	CI Cast Iron	DR Designer Radiators	ER Electric radiator	TTW Traditional towel warmer	
		E Electric	FR Flat Radiator	UFH Under floor heating	
		A Additions	MR Multirail	VT Vertical tube	



Vogue (UK) Ltd Strawberry Lane Willenhall, West Midlands WV13 3RS United Kingdom

T: +44(0) 1902 387000F: +44(0) 1902 387001E: info@vogueuk.co.ukW: www.vogueuk.co.uk

Sales Office T: +44(0) 1902 387020 F: +44(0) 1902 387021 E: sales@vogueuk.co.uk

